


NOTE:
 1.The primary coating and secondary coating have the same coulor
 2.ROHS 2.0 and REACH Compliant

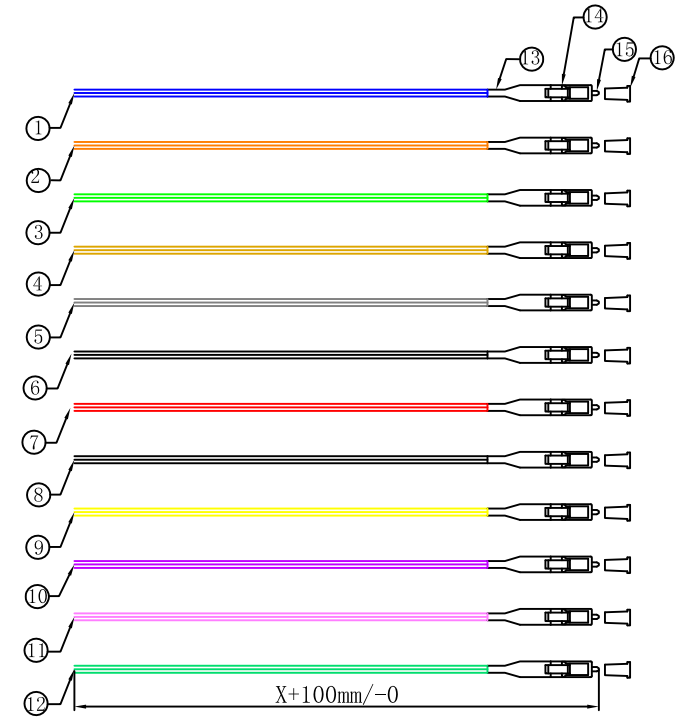

MATERIAL LIST:

⑫	LC White Dust Cap	12	
⑮	LC/ UPC MM Ferrule 126-128um	12	
⑭	LC MM Beige 0.9 Connector	12	
⑬	LC 0.9 White Boot	12	
⑫	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm TURQUOISE LSZH	Xm	
⑪	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm PINK LSZH	Xm	
⑩	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm VIOLET LSZH	Xm	
⑨	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm YELLOW LSZH	Xm	
⑧	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm BLACK LSZH	Xm	
⑦	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm RED LSZH	Xm	
⑥	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm WHITE LSZH	Xm	
⑤	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm GREY LSZH	Xm	
④	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm BROWN LSZH	Xm	
③	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm GREEN LSZH	Xm	
②	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm ORANGE LSZH	Xm	
①	Fiber Cable LOOSE TUBE OM3 50/125 0.9mm BLUE LSZH	Xm	

Type	Multi-Mode
Insertion Loss	≤0.3dB (IEC 61300-3-4)
Return Loss	NA
Test Wavelength	850nm
Group Refractive Index	1.482 @850nm 1.477 @1300nm

NO.	SPECIFICATION STANDARD	QT' Y	REMARK
BY	CHK	REVISION RECORD MODIFICATIONS	DATE


SYNERGY 21			
CUSTOMER		ITEM NO.	See the chart
PRODUCT NAME	Pigtail LC/UPC OM3 50/125 μm 12 set coloured	manufacture country	CHINA UNIT MM
DRAWNBY	CHECKBY	APPOBY	DATE
SYNERGY 21	SYNERGY 21	SYNERGY 21	2017-4-24

2017-4-24	A
DATE	REV.

SYNERGY 21®														
TEST Protokoll														
Typ:SYNERGY			ITEM No.			Artikel NO.								
Produkt Beschreibung:														
Stueckzahl :1 Stk														
Einfuegedaempfung nach DIN 18600 Verfahren 7														
Wellenlaenge 850nm														
	Erlaubte	Verlust	blue	orange	green	brown	grey	white	red	black	yellow	violet	pink	turquoise
Steckerdaempfung	0.3 dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB	dB
Return Loss (MM)														
Ergebnis	OK													
Datum:														
Achtung LWL Komponenten														
<ul style="list-style-type: none"> - Vorsichtig handhaben -Mindestbiegeradius von 40mm nicht unterschreiten -Stecken u. loesen der Verbindung nur durch 														
Handhabung am Steckergehause														
Nicht am Kabel ziehen!!!														
<ul style="list-style-type: none"> -Reklamationen in diesem Bereich koennen wir nicht anerkennen. -Ferrulen stets durch Staubschutzkap schuetzen und vor jedem Einsatz saeubern. 														

Chart:

NO.	ITEM NO.	LENGTH.	color	EAN Nummer	PACKING
1		0.5M			
2		1.0M			
3	S215477	2.0M		4038816064486	SYNERGY 21 BAG A
4		3.0M			
5		5.0M			
6		10.0M			
7		15.0M			

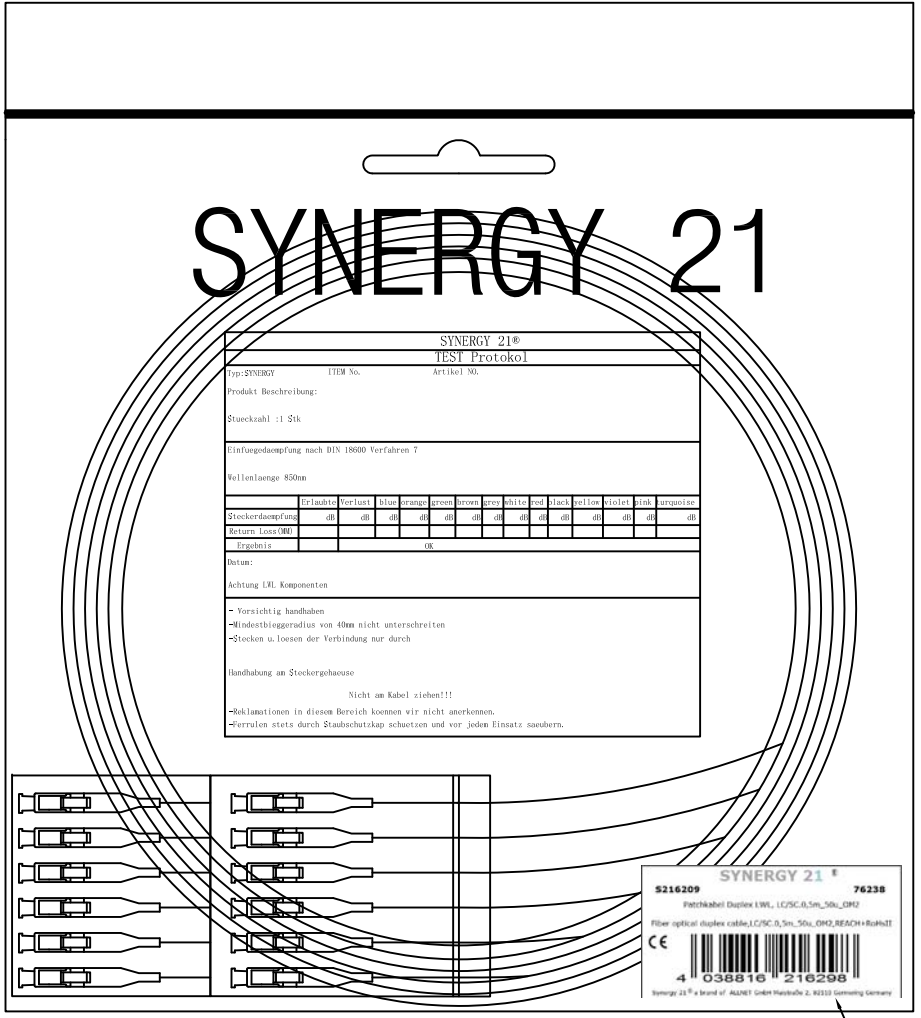

PACKING:SYNERGY 21 PE BAG + LABEL + TEST REPORT Example Label

SYNERGY 21										
CUSTOMER			ITEM NO.				See the chart			
PRODUCT NAME		Pigtail LC/UPC OM3 50/125 μm		manufacture country		CHINA	UNIT	MM		
DATE		REV.		DRAWNBY		CHECKBY		APPOBY		
BY	CHK	NEW REVISION RECORD MODIFICATIONS			2017-4-24	A	SYNERGY 21	SYNERGY 21	SYNERGY 21	DATE 2017-4-24