



REVISIONS

| REV | DATE | DESCRIPTIONS | APPRO.BY |
|-----|------|--------------|----------|
| | | | |

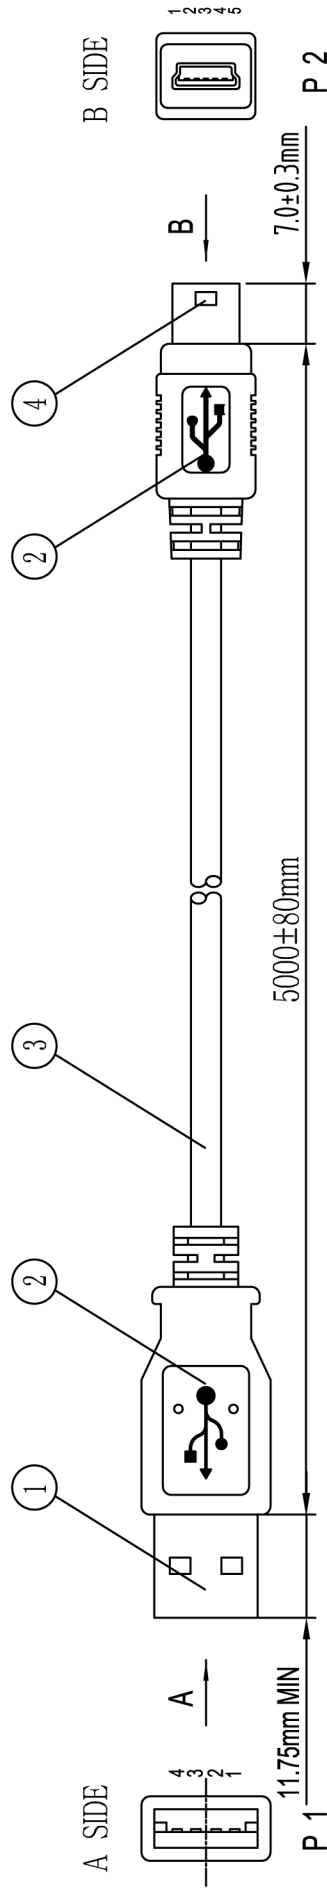

WIRING DIAGRAM

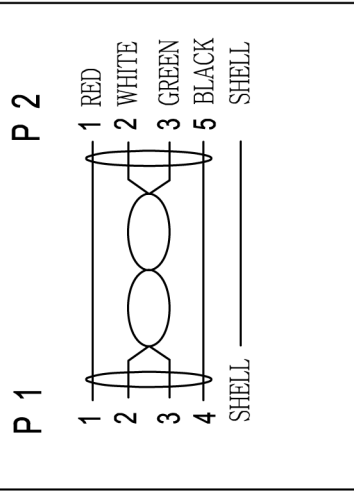

NOTE:

- 1.PRINTING:
AWM 80°C 30V VW-1 28AWG*1P 24AWG*2C
- USB2.0 HIGHSPEED CABLE
- 2.RoHS COMPLIANT

| | | | | |
|-----|-----------|--|-------|-------|
| ④ | CONNECTOR | MINI USB 5Pin B TYPE MALE NICKEL PLATED 1u" GOLD PLATED PIN, WHITE INSULATOR | SHELL | 1 Set |
| ③ | CABLE | 28AWG TXR*1P+ 24AWG TXR*2C+ AL+ B(COVERAGE RATE IN 65%) USB2.0 HIGHSPEED CABLE JACKET PVC GREY OD=4.5±0.2mm | | 1Pcs |
| ② | OVERMOLD | PVC COLOR: GREY | | 2Pcs |
| ① | CONNECTOR | USB A TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN, WHITE INSULATOR | | 1 Set |
| NO. | MAT.NANE | DESCRIPTION | | Q'TY |

| | | | |
|-----------------|-----------|----------|------------|
| CUSTOMER'S ITEM | K5250.5V2 | CUSTOMER | EFB |
| DRAWING | | TITLE | USB CABLE |
| UNIT | mm | SCALE | 1:1 |
| DRAWN BY | | CHECK BY | APPRO BY |
| Zhouqinghua | | | DATE |
| | | | 2020-09-01 |

