

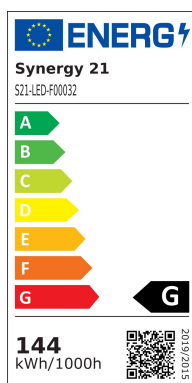


Synergy 21 Tira LED Flex DC24V/6A/144W blanco cálido, 5m

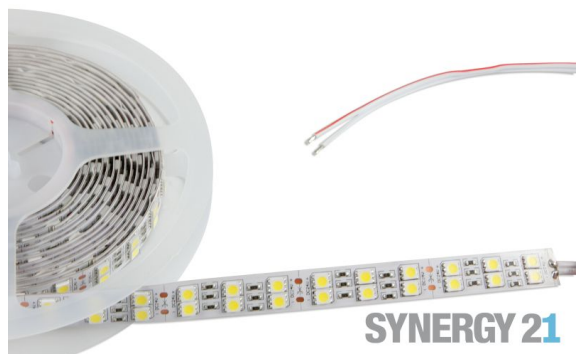

kwh/1000h:	144,00
Lúmenes:	9300
Vatio:	144,0
Vida útil nominal:	35000 Std.
Ciclos de conmutación:	50000
Temperatura ambiente óptima:	25 °C



Características técnicas:

- Alimentación: DC24V/6A/144W
- Temperatura termodinámica: 3000K
- Número de LEDs: 600 SMD5050,
- Flujo luminoso: 9300lm,
- Ángulo de enfoque: 120°
- Dimensiones: 5000 x 15 x 2,2mm
- interior

Atributos

Atributo	Valor
Abstrahlwinkel:	120
Ampere:	6
CC oder CV:	CV
CRI:	>80
Dimmbar:	abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false

Atributo	Valor
EPREL_BEAM_ANGLE:	Not applicable
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.429
EPREL_CHROMATICITY_COORD_Y:	0.394
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_RENDERING_INDEX:	87.7
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	500
EPREL_DIMENSION_HEIGHT:	2
EPREL_DIMENSION_WIDTH:	20
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CLASS:	F
EPREL_ENERGY_CONS_ON_MODE:	14
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	1549
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable
EPREL_MAX_COLOUR_RENDERING_INDEX:	82
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_MIN_COLOUR_RENDERING_INDEX:	80
EPREL_POWER_ON_MODE:	15.1
EPREL_POWER_STANDBY:	0.00
EPREL_R9_COLOUR_RENDERING_INDEX:	33.49

Atributo	Valor
EPREL_REGISTRANT_NATURE:	MANUFACTURER
EPREL_SURVIVAL_FACTOR:	1.00
Grad:	120°
Länge:	5
LED Strip Breite:	15
LED Strip Höhe:	2.20
LED Strip Länge:	5000
Lichtfarbe:	warmweiß
Lichtfarbe Name:	warmweiß
Schutzklasse:	IP20
Volt:	24
Peso:	0.35 Kg

Imágenes adicionales





Accesorios

Número de artículo	Denominación
81069	Synergy 21 Enchufe DC con borne de tornillo
81068	Synergy 21 Conector DC con borne de tornillo
81741	Synergy 21 Clip fijación de silicona para tiras LED, Pack de
125198	Mean Well LPV-150-24 Alimentación 24V/150W IP67
93682	Mean Well HLG-150H-24 Alimentación 24V/150W IP65 Regulable

Número de artículo	Denominación
98273	Synergy 21 LED Flex Strip zub. Testklemmen für Single Color
181661	Mean Well WPD-06 Dimmer EnOcean wireless PWM