


Synergy 21 LED Flex Strip add. Quick connector T



LED Strip quick wire splice connectors
LED Strip quick wire splice connectors

Material: Polycarbonate + pure copper
PU: 10 pieces (pack of 10)
Rated voltage: 300V
Rated current: 0-10A
Working temp: -20°C ~ +80°C
Max temp of the shell: +135°C
Min temp of the shell: -45°C
Size: 0.5 ~ 0.32 mm²

Additional Images

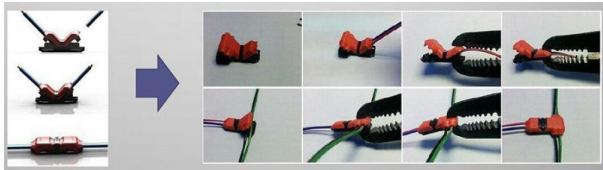

Circuit Diagram

