

X(m)	L(mm)
1	1010
2	2010
3	3010
6	6010
10	10010




CABLE MARKING:

**ECOLAN VOIP PATCHCABLE Cat.6 S/FTP 4x2xAWG26/7PIMF LSOH  
IEC332-1\*\*\*GIGABIT\*\*\* E132276-C(UL) CM 75°C 4PR 26AWG CSA  
LL64151-C CMG 75°C FT4 Cat.6 S/FTP PATCH CORD**

\* NOTE: All relevant materials are complied with RoHS directive .

P1	P2
1	1 WHITE/ORANGE
2	2 ORANGE
3	3 WHITE/GREEN
4	4 GREEN
5	5 BLUE
6	6 WHITE/BLUE
7	7 WHITE/BROWN
8	8 BROWN
SHIELD	SHIELD

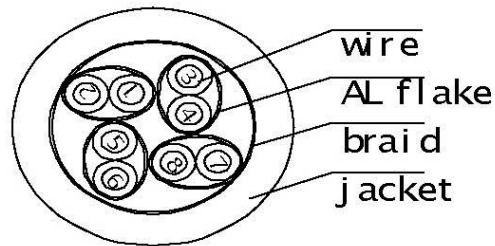

CAT.6 PIMF SHIELDED VOIP Patch Cable STRUCTURE

3	MOLDED 45P PVC BLACK		
2	4 TWISTED PAIRS PIMF CAT.6 26AWG , BRAID SHIELDED 65% S/FTP OD 6.2mm, JACKET LOW SMOKE ZERO HALOGEN (LSZH), COLOUR BLACK	Lmm	
1	8P8C MODULAR SHIELDED PLUG, GOLD PLATING 3U" ON CONTACTS, SHORT TYPE	2	
No.	DESCRIPTION	Q'TY	Supplier

APPROVED		Revision:		Cable Length Unless Other Spec. Tolerances: 0 ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED				
DRAWING		EP		
DATE		20/02/09		

CHECKED		ITEM		<b>K2460.x</b>		UNIT:mm	
---------	--	------	--	----------------	--	---------	--