


## Synergy 21 LED Flex Strip 70 KW DC24V 36W IP20 CRI>90 2110



kwh/1000h:	39,60
Lumens:	3385
Watt:	36,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

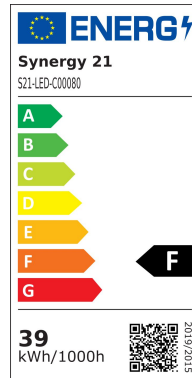

Synergy 21 LED Flex Strip 2110  
2110=LED chip size 2.1mm x 1.0mm

Length: 5m  
Voltage: 24V, (12V available on request)  
Watt: 7,2W/m, 36W  
Light colour: cold white, 6000K, CRI>90 (R9>60)  
Brightness: 677lm/m Total: 3385lm  
Beam angle: 120°  
Protection class: IP20  
Number of LEDs: 70\*2110SMD/m, total: 350LEDs  
Dimensions: 5000\*8\*3mm  
PCB colour: white,  
Operating temperature: -25°C to +40°C  
Shortenable every 7 LEDs 100mm  
Adhesive tape: yes 3M on the back

Energy efficiency class: A+  
kWh/1000h: 39.6

Strip can be shortened at the cut marks with sharp scissors.  
!Attention! Strip must first be checked for functionality.  
Only split the strip when no current is present.

Our 3M adhesive tape adheres well, but should only be used as a mounting aid.

There are a variety of mounting options, such as clips, permanently elastic mounting adhesive, cable ties, etc.

Please note that LED strips must also be cooled.


Make sure that the LED strip does not exceed a working temperature of 40°C, otherwise its service life cannot be guaranteed.

No guarantee can be given for overheated LED strips.

## Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	1.50
CC oder CV:	CV
CRI:	>90
Dimmbar:	abhängig vom Netzteil
LED Strip Klebeband:	ja
LED Strip Breite:	8
LED Strip Höhe:	3
LED Strip Klebeband:	ja
LED Strip kürzbar:	86
LED Strip Länge:	5000
Lichtfabe in Kelvin:	6000
Lichtfarbe:	kaltweiß
Lichtfarbe in Kelvin:	6000
Lichtfarbe Name:	kaltweiß
Lumen:	3385
Schutzklasse:	IP20
Volt:	24
Weight:	0.1 Kg
Warranty:	60.00 Months

## Additional Images

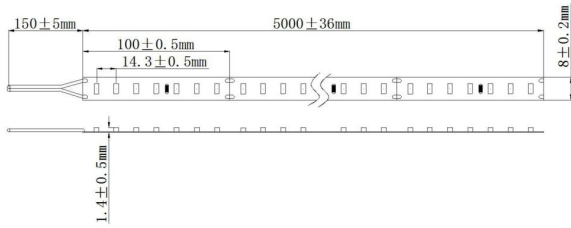

## Accessories

Part No.	Name
93682	Mean Well Power Supply - 24V 150W Dimmable IP65
174020	Synergy 21 Power supply - 24V 100W BILTON