


Synergy 21 LED Flex Strip 60 WW DC12V 24W IP68



kwh/1000h:	27,00
Lumens:	1600
Watt:	24,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

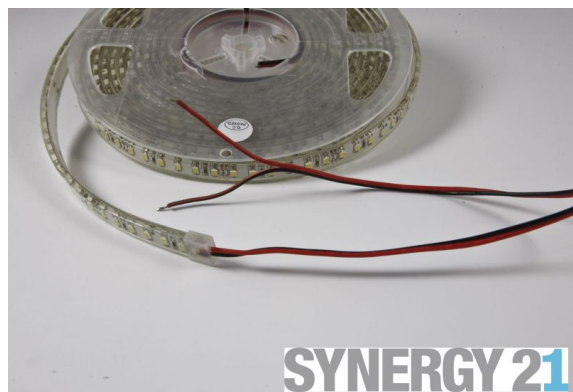

LED Flex Strip warm white, IP68, white PCB
DC12V, max. 2A, 24W ± 10%,
Light colour: 3000K ±150 warm white
Brightness: 1600lm
300Leds, 120°, 3528SMD
Beam angle: 120°
Length: 5000*10*5mm,
IP68, filled tube
Can be shortened:all 3 LEDs
Open cable end
Suitable up to -25°C!

Strip can be shortened at marking points with sharp scissors.
!Attention! Strip must first be checked for functionality.
Only split the strip when no current is present.

Our 3M adhesive tape adheres well, but should only be used as a mounting aid.
There are a variety of mounting options, such as clips, permanent mounting adhesive, cable ties, etc.

Energy efficiency class: A
kWh/1000h: 24

Please note that LED strips also need to be cooled.
Make sure that the LED strip does not exceed the operating temperature of 40°C, otherwise the service life cannot be guaranteed.

Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	2
Betriebstemperatur:	bis -25
CC oder CV:	CV
CRI:	>80
Dimmbar:	abhängig vom Netzteil
Länge:	5
LED Strip Klebeband:	ja
LED Strip Breite:	10
LED Strip Höhe:	5
LED Strip Klebeband:	ja
LED Strip kürzbar:	50
LED Strip Länge:	5000
Lichtfabe in Kelvin:	3000
Lichtfarbe:	warmweiß
Lichtfarbe in Kelvin:	3000
Lichtfarbe Name:	warmweiß
Lumen:	1600
Schutzklasse:	IP68
Volt:	12
Weight:	0.2 Kg

Additional Images



Accessories

Part No.	Name
81069	Synergy 21 LED zub Hollow Socket with Screw Terminals
81068	Synergy 21 LED zub wooden plug with screw terminals
81741	Synergy 21 LED Flex Strip add. Silicone mounting clip 10 pack
148726	Synergy 21 - Waterproof connector 1:1
148727	Synergy 21 - Waterproof connector 1:2
148730	Synergy 21 - Waterproof connector box 3 ports
148729	Synergy 21 - Waterproof connector box 3 ports transparent
148728	Synergy 21 - Waterproof connector box 4 ports
139522	Mean Well power supply - 12V 120W IP67