CS72U/CS74U



2/4-Port USB KVM Switch


The CS72U / CS74U 2/4-Port USB KVM Switch is a desktop control unit that allows users to access two or four computers from a single KVM console (keyboard and mouse, audio and VGA monitor).

With the CS72U / CS74U, you can access computers conveniently using port selection pushbuttons located on the unit's front panel.

Setup is fast and easy; simply plug cables into their appropriate ports. There is no software to configure, no installation routines, and no incompatibility problems. Since the CS72U / CS74U intercepts keyboard input directly, it will work on multiple computing platforms.

Setup



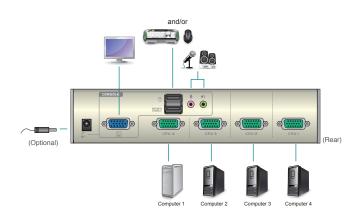















Features

- One VGA console controls two (CS72U) or four (CS74U) USB VGA interface computers
- Computer selection via front panel pushbuttons
- Multiplatform support Windows, Linux and Mac
- Audio Enabled full bass response provides a rich experience for 2.1 channel surround sound systems
- Superior video quality 2048 x 1536; DDC2B
- Supports USB hot-plugging
- · Non-powered

Specifications -----

Function			CS72U	CS74U
Computer Connections			2	4
Port Selection			Front Panel Pushbuttons	
Connectors	Console Ports	Keyboard	1 x USB Type A Female (Black)	
		Video	1 x HDB-15 Female (Blue)	
		Mouse	1 x USB Type A Female (Black)	
		Microphone	1 x mini stereo Jack Female (Pink)	
		Speaker	1 x mini stereo Jack Female (Green)	
	KVM Ports		2 x SPHD-18	4 x SPHD-18
			Female (Green)	
	Power		1 x DC 5V Jack (Spare)	
LEDs	On Line		2 (Orange)	4 (Orange)
	Selected		2 (Green)	4 (Green)
Switches	Selected		2 x Pushbuttons	4 x Pushbuttons
Video			2048 x 1536 @ 60 Hz; DDC2B	
Power Consumption			DC5V, 0.5W	
Environment	Operating Temp.		0-50°C	
	Storage Temp.		-20-60°C	
	Humidity		0–80% RH, Non-condensing	
Physical Properties	Housing		Metal	
	Weight		0.45 kg	0.64 kg
	Dimensions		13.00 x 7.45 x	20.00 x 7.45 x
	(L x W x H)		4.20 cm	4.20 cm

^{*} Product specifications and appearance are subject to change without notice.

