



## Synergy 21 LED recessed ceiling spot Prometheus mini-max RGB-W V2



SYNERGY 21

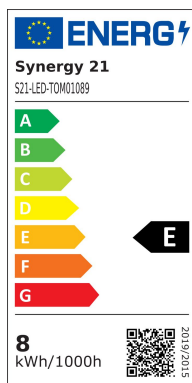

kwh/1000h:	8,00
Lumens:	880
Watt:	8,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C




12 watt recessed ceiling spotlight  
Anodised aluminium surface, matt finish  
Power supply: 12 Volt  
Beam angle: 60 °  
LED chip: 3x4 Watt CREE MCE4CT  
Lumen: white 240lm  
Kelvin white: 3700-4000K  
Head diameter: 93 mm  
Total height: 80 mm  
Spring clip with plastic coating  
Frosted glass disc  
two-part, recessed ceiling ring and luminaire body with cooling

Bolt circle:  $\varnothing 74.4\text{mm}$  => saw  $\varnothing 75$  or  $\varnothing 76$

Energy efficiency class: A++  
kWh/1000h: 8

## Additional Images

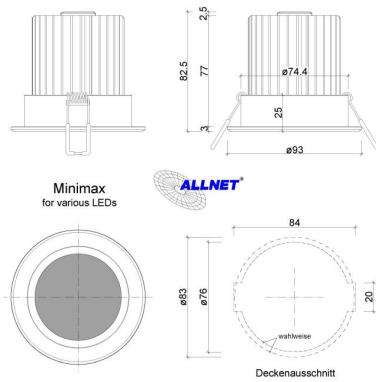

## Accessories

Part No.	Name
135731	Synergy 21 LED Controller 3653 LED RGB-WW (RGB-CCT) Master Set
90560	Synergy 21 LED zub Screw Terminal KEFA (Phoenix® compatible) Plug 5 F
90562	Synergy 21 LED zub screw terminal KEFA (Phoenix® compatible) plug 5 M
102189	PortaLuce® Lightcontroller N°3458 Distributor
136728	Mean Well Power Supply - 12V 60W IP67