


Synergy 21 LED Flex Strip kaltweiß DC24V 72W IP20



kWh/1000h:	72,00
Lumen:	4500
Watt:	72,0
Nennlebensdauer:	35000 Std.
Schaltzyklen:	50000
Opt. Umgebungstemp.:	25 °C

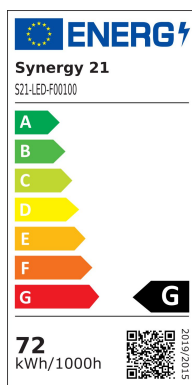

LED Flex Strip kaltweiß,
DC24V, max. 3A, max power 72W,
300Leds, SMD5050, 120°
5900-6500K
Länge: 5000*10*2,5mm,
indoor

Klebeband zur Montagehilfe auf der Rückseite
Strip an Markierungsmarken mit scharfer Schere kürzbar.
!Achtung! Strip muss zuvor auf Funktionalität überprüft werden.
Strip nur teilen wenn kein Strom anliegt.

Energieeffizienzklasse: A
kWh/1000h: 72

Bitte beachten sie, dass auch LED Streifen gekühlt werden müssen.
Achten sie darauf, dass der LED Strip die Arbeitstemperatur von 40°C nicht überschreitet, da sonst die Lebensdauer nicht gewährleistet werden kann.

Merkmale

Merkmal	Wert
---------	------

Abstrahlwinkel:	120
Ampere:	3
CC oder CV:	CV
CRI:	>80
Dimmbar:	abhängig vom Netzteil
EPREL_ANTI_GLARE_SHIELD:	false
EPREL_BEAM_ANGLE:	Not applicable
EPREL_BEAM_ANGLE_CORRESPONDENCE:	SPHERE_360
EPREL_CAP_TYPE:	/
EPREL_CHROMATICITY_COORD_X:	0.320
EPREL_CHROMATICITY_COORD_Y:	0.340
EPREL_CLAIM_EQUIVALENT_POWER:	false
EPREL_COLOUR_RENDERING_INDEX:	94.4
EPREL_COLOUR_TUNEABLE_LIGHT_SOURCE:	false
EPREL_CONNECTED_LIGHT_SOURCE:	false
EPREL_CORRELATED_COLOUR_TEMP_TYPE:	RANGE
EPREL_DIMENSION_DEPTH:	500
EPREL_DIMENSION_HEIGHT:	2
EPREL_DIMENSION_WIDTH:	10
EPREL_DIMMABLE:	NO
EPREL_DIRECTIONAL:	NDLS
EPREL_ENERGY_CLASS:	F
EPREL_ENERGY_CONS_ON_MODE:	7
EPREL_ENVELOPE:	NO
EPREL_EQUIVALENT_POWER:	Not applicable
EPREL_HIGH_LUMINANCE_LIGHT_SOURCE:	false
EPREL_LIGHTING_TECHNOLOGY:	LED
EPREL_LUMEN_MAINTENANCE_FACTOR:	0.98
EPREL_LUMINOUS_FLUX:	660
EPREL_MAINS:	NMLS
EPREL_MAX_BEAM_ANGLE:	Not applicable
EPREL_MAX_COLOUR_RENDERING_INDEX:	95

Merkmal	Wert
EPREL_MIN_BEAM_ANGLE:	Not applicable
EPREL_MIN_COLOUR_RENDERING_INDEX:	92
EPREL_POWER_ON_MODE:	7.6
EPREL_POWER_STANDBY:	0.00
EPREL_R9_COLOUR_RENDERING_INDEX:	80
EPREL_REGISTRANT_NATURE:	MANUFACTURER
EPREL_SURVIVAL_FACTOR:	1.00
Länge:	5
LED Strip Klebeband:	ja
LED Strip Breite:	12
LED Strip Höhe:	2.50
LED Strip Klebeband:	ja
LED Strip kürzbar:	100
LED Strip Länge:	5000
Lichtfabe in Kelvin:	6250
Lichtfarbe:	kaltweiß
Lichtfarbe in Kelvin:	6250
Lichtfarbe Name:	kaltweiß
Lumen:	4500
Schutzklasse:	IP20
Volt:	24
Gewicht:	0.1 Kg
Garantie:	24.00 Monate

Weitere Bilder



Zubehör

Art.-Nr.	Name
81069	Synergy 21 LED zub Hohlbuchse mit Schraubklemmen
81068	Synergy 21 LED zub Hohlstecker mit Schraubklemmen
81741	Synergy 21 LED Flex Strip zub. Silikonbefestigungsschelle 10er Pack
125198	Synergy 21 Netzteil - 24V 150W Mean Well IP67
93682	Synergy 21 Netzteil - 24V 150W Mean Well dimmbar IP65
174020	Synergy 21 Netzteil - 24V 100W BILTON
174654	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 1 line clear
174653	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 1 line red
174656	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 2 line clear
174655	Synergy 21 LED FLEX Strip zub. Easy Connect I shape for 2 line red
174648	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line clear
174650	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line clear
174647	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line red
174649	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 1 line red
174652	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 2 line clear
174651	Synergy 21 LED FLEX Strip zub. Easy Connect T shape for 2 line red
174617	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to strip Joint 12mm HD
174608	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to Wire 12mm HD
174633	Synergy 21 LED FLEX Strip zub. Easy Connect Strip to Wire 10/12mm IP67