


Connection Method

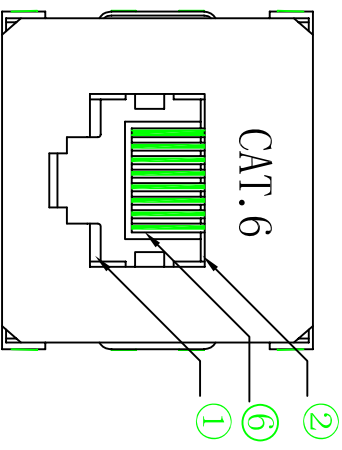


technical requirement:  
 1、 The product should be followed with Cat 6 connection and technical standard;  
 2、 Unmarked tolerance dimension on the basis of SJ/T10628 – 1995 6 grade;  
 3、 The material should be ROHS approved.  
 4、 Packing: 1Pcs/PE BAG + LABEL 10PCS /BIG PE BAG

- ① \_\_\_\_\_ ①
- ② \_\_\_\_\_ ②
- ③ \_\_\_\_\_ ③
- ④ \_\_\_\_\_ ④
- ⑤ \_\_\_\_\_ ⑤
- ⑥ \_\_\_\_\_ ⑥
- ⑦ \_\_\_\_\_ ⑦
- ⑧ \_\_\_\_\_ ⑧

### MATERIAL LIST:

①	Contact	8P8C 6U" Gold Plated	8	
⑤	Base	ABS	1	
④	roof cover	ABS	1	
③	shielded enclosure	Nickel Plated brass t=0.3mm	2	
②	PCB	FR-4, t=0.8	1	
①	PCB outlet	PBT	2	
NO	MAT. NAME	DESCRIPTION	QT' Y	REMARK

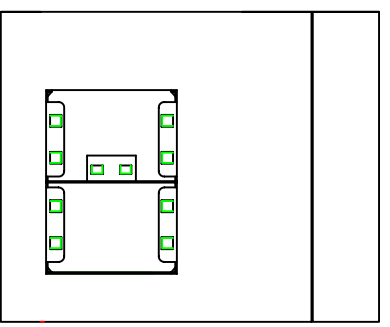

BY	CHK	REVISION RECORD MODIFICATIONS
		NEW

DATE	REV.
2010/05/17	A

SYNERGY 21				
CUSTOMER	Allnet computersystem GmbH	ITEM NO.	S215237	
PRODUCT NAME	8P8C RJ45 STP Connector Cat. 6	manufacturer country:	CHINA	UNIT
DRAWNBY	CHECKBY	APPROBY	DATE	MM
SYNERGY 21	SYNERGY 21	SYNERGY 21	SYNERGY 21	2010/05/17