


Artikelnummer: H02010A0083


Modul-Aufnahme 50x50 aufbauend, 2-fach, UP/50 BR unbestückt, für Unterputz-Anwendungen



Technische Attribute	
Kurzbezeichnung	Modul-Aufnahme 50x50, aufbauend
Ausführung	2-fach UP/50 inkl. Modulträger, Beschriftungsfenster und Shutter, unbestückt
Anmerkungen	für Unterputz und Hohlwand Geräte-Dosen nach DIN 49073, 30° Auslass
Serie	AMJ-S; AMJ Modul K; AMJ Kupplung K; UMJ Modul K; UMJ Kupplung K
Farbe	alpinweiß

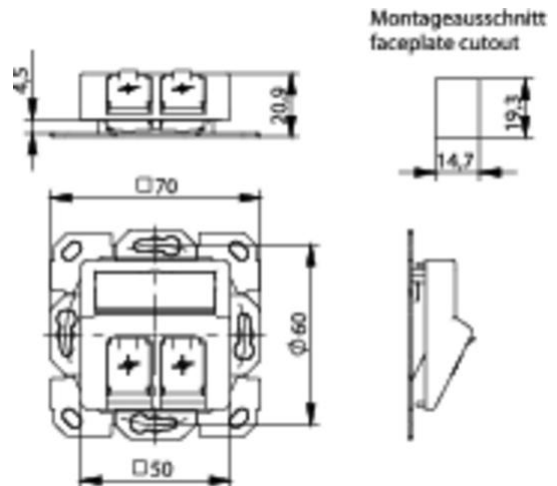

Produkt-Beschreibung




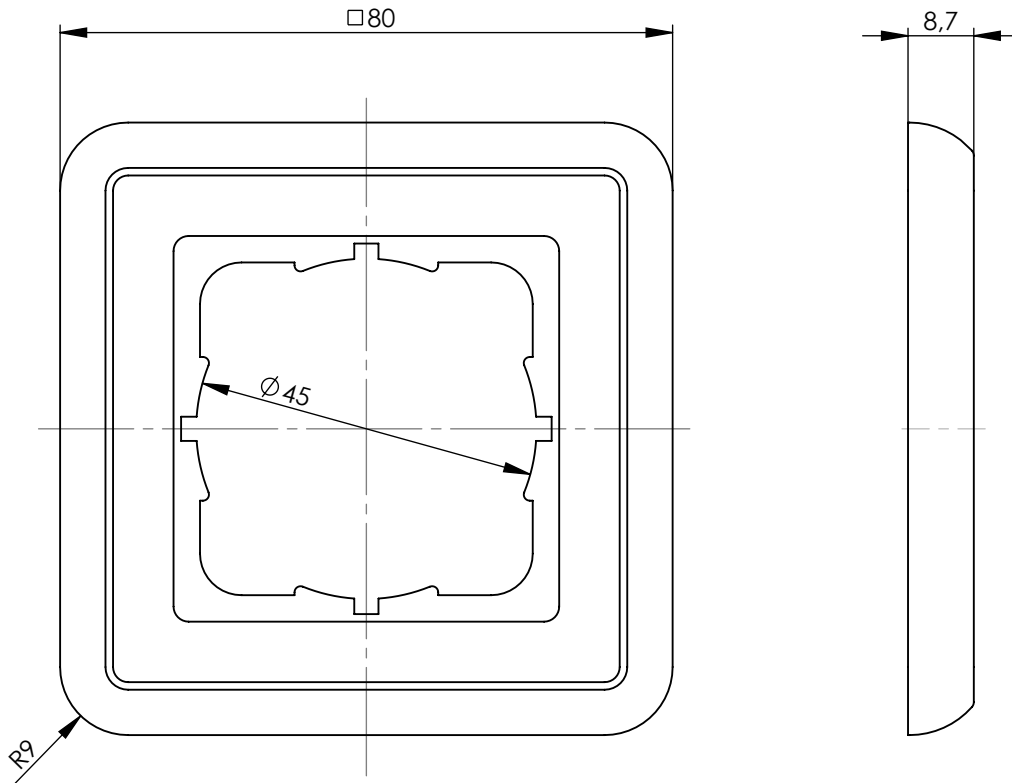
Für den flexiblen Einsatz bietet Telegärtner ein breites Sortiment an verschiedensten Applikationen, in denen die AMJ- und UMJ-Module und Kupplungen montiert werden können. Hierzu werden keine zusätzlichen Adapter benötigt.



Bestell-Nr. Order no	Bezeichnung Description	Farbe Colour	Barcode EAN 13	VPE PU
B00004A0021	1-fach Abdeckrahmen 80x80 single cover frame 80x80	alpinweiß alpine white	4018359255060	5

Bestell-Nr. Order no	Verpackung Packing	VPE PU	Karton Carton	UPE OPU	Karton Carton	UPE OPU	Karton Outer carton
B00004A0021	5 pcs in carton	5 pcs in carton	81x81x43 [mm]	-	-	-	-

Änd./ rev. index	Änderungs-Nr. / revision code	Datum / date	Name / name	Datum / date	Name / name	Gewicht / weight [g]
				13.07.2015	BU	
				23.07.2015	AS	ca./approx.
			Maßstab / scale	Benennung / title		
			1:1	Cover frame single Abdeckrahmen 1-fach		
			unt. Maße/ dim. without tolerances according to	Untert./doc. type	Zeichnungsnr./ drawing no.	
				D	B00004A0021	 Maße/ dimensions: mm
				Ersatz für/ replaces	B00004A0019	Original : DIN A4
						Blatt/ sheet 1 von/ of 1

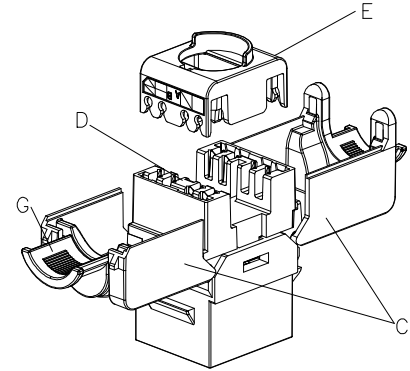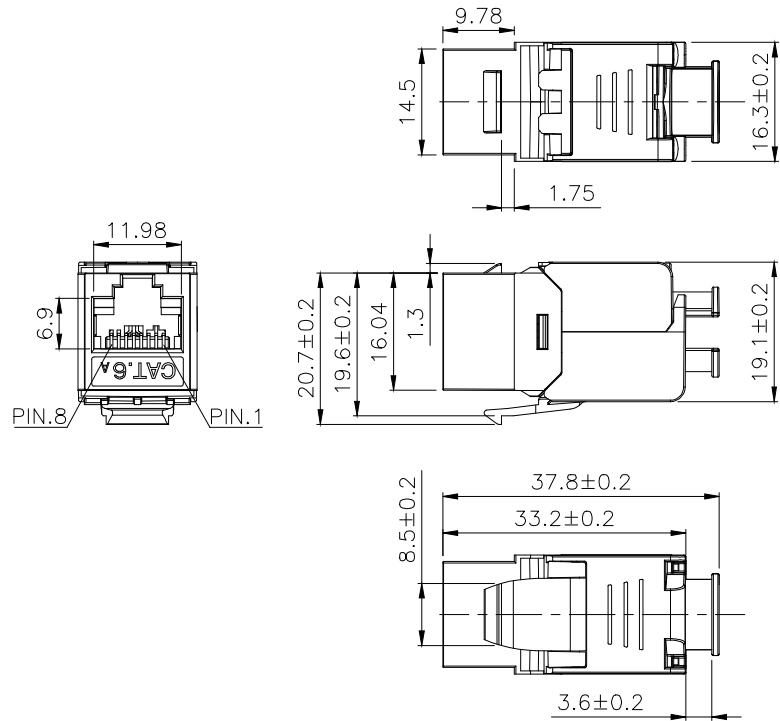

NOTES:

ELECTRICAL:

- 1. Contact Resistance : 20MΩ MAX
- 2. Insulation Resistance : 500MΩ MIN @ 500V DC
- 3. Withstand Voltage : DC1000V AC700V RMS 60Hz, 1MIN

ENVIRONMENTAL:

- 1. Storage : -40° TO+70°
- 2. Operation : -10° to+60°

MECHANICAL

- 1. SHIELD MATERIAL: ZINC ALLOY
- 2. IDC MATERIAL: PC UL94V2 TERMINAL:PHOSPHOR BRONZE, TIN PLATING
- 3. IDC Life : 250 Times Min
- 4. Support PoE per IEEE 802.3af, PoE+ per IEEE 802.3at
- 5. RJ45 Contacts durability:750 cycles min
- 6. For cable AWG 23/1-26/1(1/0.40-1/0.58mm)
- 7. For cable OD:5.5-9.0mm

ISO/IEC 11801-1

EIA/TIA 568-C

IEC 60603-7-51

RoHS 2.0 and REACH Compliant

Accessories

▪Cable Tie(75X1.9mm) *1Pc

▪Copper foil*1Pc

Function test: AEM MMVAN-200+VNA Manager TEST

Website: <https://aem-test.com/>

(Random test 0.3%)

SinglePack: 1pc/PE bag+label; SubPack: 25pcs/box+label; Carton +labelx2;

MATERIAL LIST:


⑦	MODULAR COVER	PC UL94V2	1	
⑥	RJ 45 JACK INSERT	8P8C GOLD PLATED	8	
⑤	PCB	1.0mm UL 94V0	1	
④	IDC BODY	PC UL 94V2	1	
③	IDC PIN	PHOSPHOR BRONZE & TINNED	8	
②	LABEL COLOR CODE	T568A/B	2	
①	IDC TERMINAL	FOR 23-26AWG CABLE	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

SYNERGY21


					CUSTOMER				ITEM NO.	S216379		
					PRODUCT NAME	Components Cat.6A Keystone Jack 180 degree Slim Type			manufacture country:	CHINA	UNIT	MM
					NEW	2021-11-16	A0	DRAWNBY	CHECKBY	APPOBY	DATE	
BY	CHK	REVISION RECORD MODIFICATIONS			DATE	REV.	SYNERGY21	SYNERGY21	SYNERGY21	2021-11-16		

Installationsanleitung/Installation guide


Super slim Cat.6A Keystone Jack

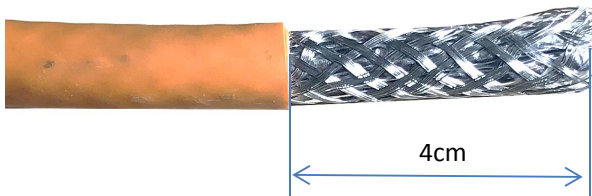


①.Stripping 4cm of sheath.

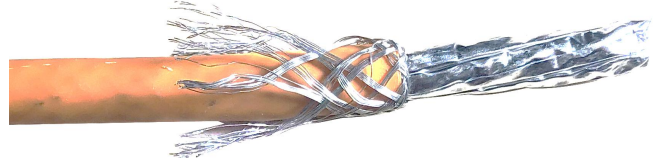


②.foldback braided and drained wire.

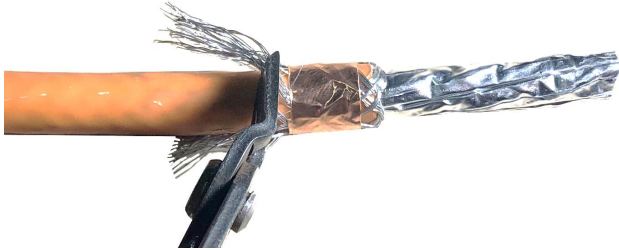


③.paste copper foil on the braided and ground wire and cut off the excess weave and the ground wire

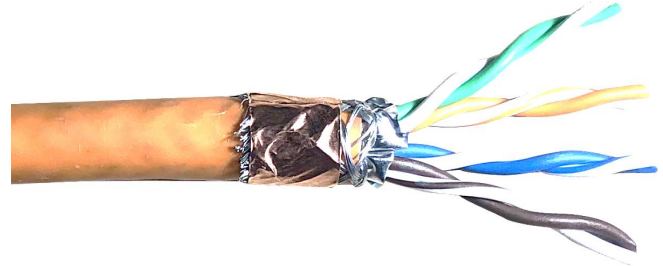

④.4.Fan out all four twisted pairs, allocate each by following colorcoding label

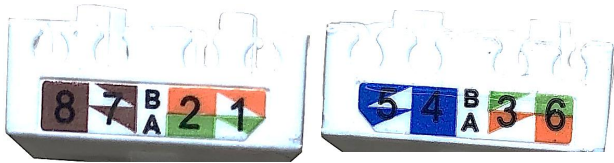


⑤.Across the holde by the color marks of T568A or T568B

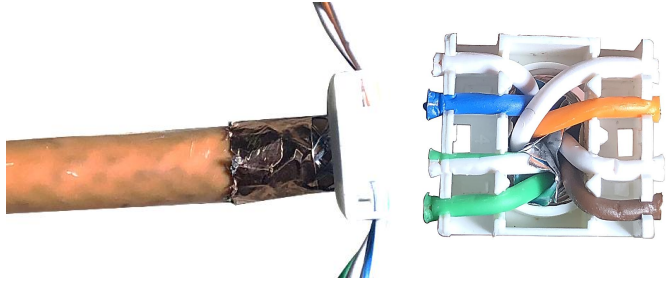


⑥. allocate each conductor into proper slots on wiring cap by following color coding




⑦.Trim the theends of conductors.

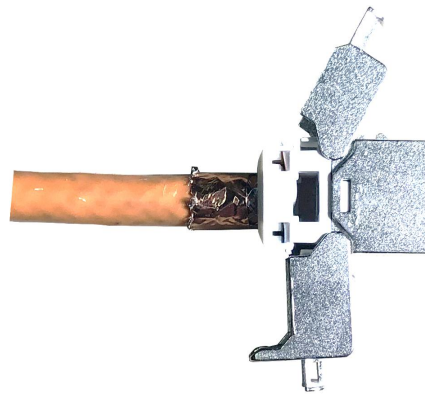

⑧.install the termination cap in direction of arrow into the keystone jack

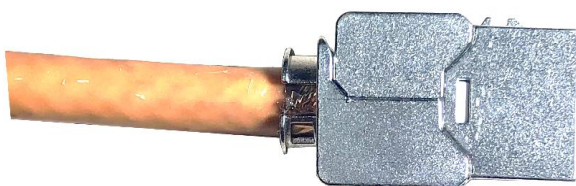

⑨.press both covers of the keystone jack to contact the cable

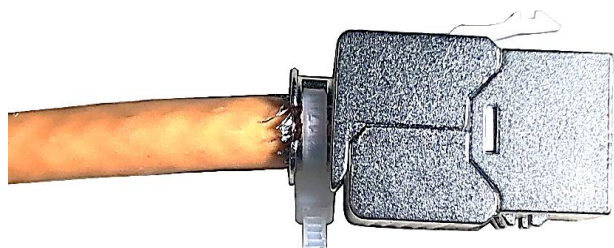

⑩.use cable tie for strain relief and to fix the shielding clamp