


## Synergy 21 LED-Flex-Streifen 30 WW DC12V 12W IP20



kwh/1000h:	13,20
Lumens:	1140
Watt:	12,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

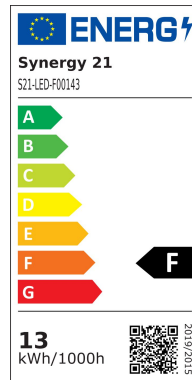

Synergy 21 LED Flex Strip warm white DC12V 12W IP20

Voltage: 12V, max1A  
Watt: 12W±10%  
Light colour: warm white, 3000K±250k  
Brightness: 1140lm, 228lm/m  
Beam angle: 120°  
Protection class: IP20  
Number of LEDs: 150\*3528SMD  
Dimensions: 5000\*8\*3 mm  
PCB colour: white, open cable end  
Operating temperature: -25°C to +40°C  
Can be shortened every 3 LEDs  
Adhesive tape: yes 3M on the back

Energy efficiency class: A  
kWh/1000h: 13.2

Strip can be shortened at the cut marks with sharp scissors.  
!Attention! Strip must first be checked for functionality.  
Only split the strip when no current is present.



Our 3M adhesive tape adheres well, but should only be used as a mounting aid.  
There are a variety of mounting options, such as clips, permanently elastic mounting adhesive, cable ties, etc.

Please note that LED strips must also be cooled.  
Make sure that the LED strip does not exceed a working temperature of 40°C, otherwise its service life cannot be guaranteed.  
No guarantee can be given for overheated LED strips

## Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	1
CC oder CV:	CV
CRI:	>80
Dimmbar:	abhängig vom Netzteil
Länge:	5
LED Strip Klebeband:	ja
LED Strip Breite:	8
LED Strip Höhe:	3
LED Strip Klebeband:	ja
LED Strip kürzbar:	100
LED Strip Länge:	5000
Lichtfabe in Kelvin:	3000
Lichtfarbe:	warmweiß
Lichtfarbe in Kelvin:	3000
Lichtfarbe Name:	warmweiß
Lumen:	1440
Schutzklasse:	IP20
Volt:	12
Weight:	0.2 Kg

## Additional Images

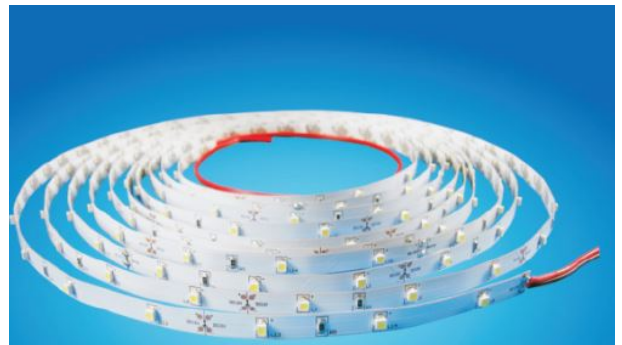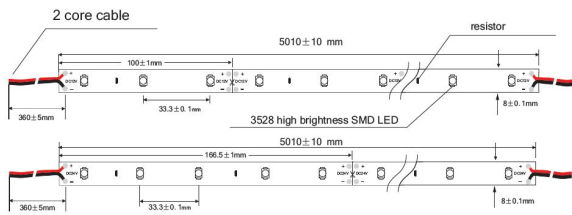

## Accessories

Part No.	Name
81069	Synergy 21 LED zub Hollow Socket with Screw Terminals
81068	Synergy 21 LED zub wooden plug with screw terminals
81741	Synergy 21 LED Flex Strip add. Silicone mounting clip 10 pack
139522	Mean Well power supply - 12V 120W IP67
107727	HEP Power Supply - 12V 12W - HEP for Flush Mount Box