

## Synergy 21 Proyector LED 100W RGB-WW IP65 \*Milight/Miboxer\*



kwh/1000h:	100,00
Lúmenes:	7500
Vatio:	100,0
Vida útil nominal:	35000 Std.
Ciclos de conmutación:	50000
Temperatura ambiente óptima:	25 °C



Miboxer Proyector LED 100W RGB-WW con 25° de ángulo de enfoque



Se puede controlar con un mando a distancia inalámbrico y/o un controlador WLAN para iOS y Android, ambos disponibles por separado, ver accesorios.

- Nombre del producto: 100W RGB+CCT Smart LED Garden Lamp
- Modelo: FUTC07
- Potencia: 100W
- Voltaje de entrada: AC100~240V 50/60Hz
- Temperatura de funcionamiento: -20-60°C
- CCT: 2700K~6500K
- Flujo luminoso: 7500LM
- Eficiencia lumínica: 75LM/W
- CRI:Ra >80
- PF: >0.9
- Vida útil: 50.000 horas
- Ángulo de enfoque: 25°
- Distancia de iluminación: >15m
- Clase de protección: IP65
- RF: 2.4GHz
- Potencia de transmisión: 6dBm
- Distancia de control: 30m
- Clase de eficiencia energética : A+
- kWh/1000h: 100

## Atributos


Atributo	Valor
Abstrahlwinkel:	25
Dimmbar:	Ja
Grösse:	345*60*415
LED - Gehäusematerial:	Aluminium
Lichtfarbe:	RGB-WW
Lichtfarbe in Kelvin:	2700~6500
Lumen:	7500
Schutzklasse:	IP65
Volt:	230
Peso:	1 Kg

## Imágenes adicionales

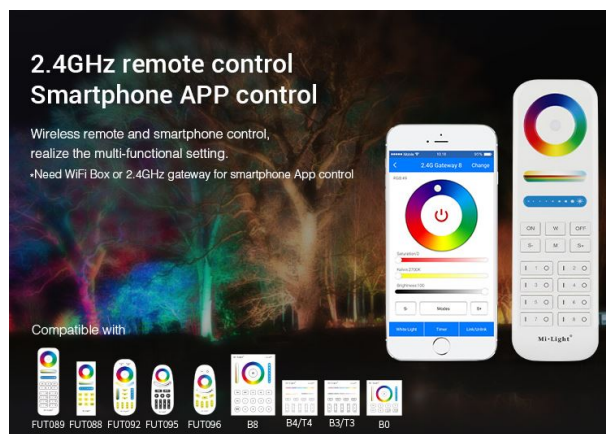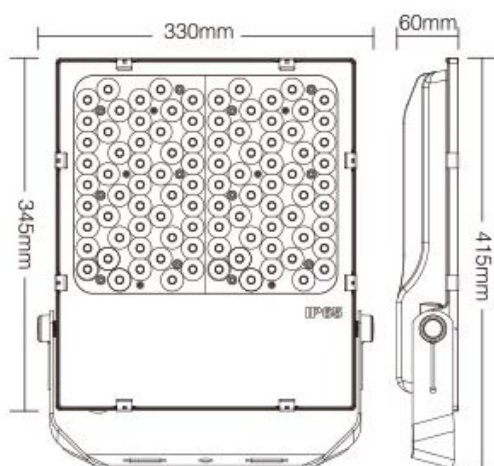

## Support Third Party Voice Control

It need 2.4GHz gateway for third party voice control

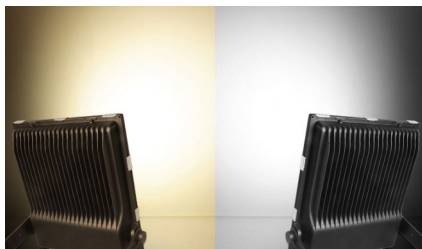


### IP65 Waterproof

Professional waterproof technology,  
high performance waterproof



### Auto-transmitting function

One garden light can transmit the signals from the remote control to another garden light within 30m, as long as there is a garden light within 30m, the remote control distance can be limitless.

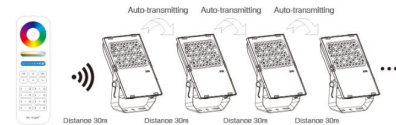

### Auto-synchronization function

Different garden light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed, and within 30m distance.

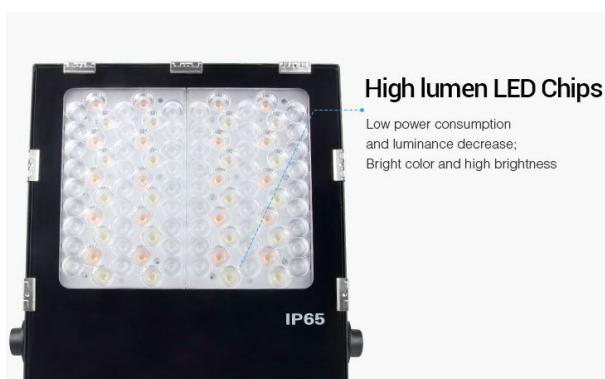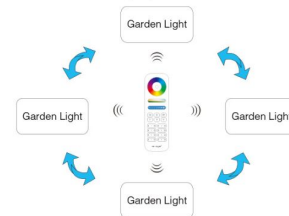

### High lumen LED Chips

Low power consumption  
and luminance decrease;  
Bright color and high brightness

### Optical Lens

Anti-dazzling optical lens; diverging light scientifically. Symmetrical and bright light ray



### High efficiency heat dissipation

Integrative Aluminum design; Inserted thermal conduction. Protect light source lifespan



## Accesorios

Número de artículo	Denominación
147981	Synergy 21 LED Fernbedienung RGB-WW (RGB-CCT) 8 Zonen *Milight/Miboxer*
147982	Synergy 21 LED Fernbedienung RGB-WW (RGB-CCT) 4 Zonen *Milight/Miboxer*
148005	Synergy 21 LED Fernbedienung Smart Panel RGB-WW (RGB-CCT) 4 Zonen *Milight/Miboxer*
148006	Synergy 21 Panel de control 8 zonas *Milight/Milboxer*
181054	Synergy 21 LED Fernbedienung WLAN Controller *Milight/Miboxer*
148507	Synergy 21 LED Fernbedienung WLAN Controller Smart Light *Milight/Miboxer*
147265	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Open End mit Adernendhülsen, 1,8m,Black