

devices

- 2 port USB Hub built in
- Dual interface supports computers with PS/2 or USB keyboards
- Multiplatform support: compatible with all operation platforms PC (Windows, Linux and most others), Mac and Sun
- With speaker and microphone support
- Bi-directional switching and flexible interoperability; switch permits independent PC, independent peripheral, and independent audio function, regardless of KVM switch focus
- Auto PS/2 and USB interface detection
- Buzzer On/Off via hotkey
- Keyboard and mouse emulation for error free booting
- Computer selection via front panel pushbuttons and hotkeys
- Superior video quality up to 2048 x 1536; DDC2B
- Firmware upgradable
- OS Support: Windows 2000, Windows XP, Windows Vista, LINUX, Mac, Sun and FreeBSD
- SUN/Mac keyboard support and emulation* *1.PC keyboard combinations emulate SUN/Mac keyboards. *2.SUN/Mac keyboards only work with their own computers


| Package Content

- 1x USB KVMP Switch
- 4x USB KVM Cables
- 1x Firmware Upgrade Cable
- 1x User Manual
- 1x Quick Start Guide

I Diagram

TP.

http://www.aten.com/products/productItem.php?pcid=20070130111333003&psid=20...

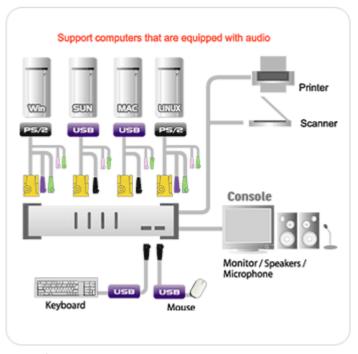

+ View enlargement

I Specification

Computer Connections Port Selection USB Port/Audio Port Selection			4
			Hotkeys, Pushbutton
			Hotkey
Connectors	Console Ports	Keyboard	1 x USB Type A Female (White)
		Video	1 x HDB-15 Female (Black)
		Mouse	1 x USB Type A Female (White)
		Speaker	1 x Mini Stereo Jack Female (Green)
		Microphone	1 x Mini Stereo Jack Female (Pink)
	KVM Ports	Keyboard/Video/Mouse	4 x SPHD-15 Female (Yellow)
		Speaker	4 x Mini Stereo Jack Female (Green)
		Microphone	4 x Mini Stereo Jack Female (Pink)
	USB Hub		2 x USB Type A Female (Black)
	F/W Upgrade		1 x RJ11 Female (Black)
	Power		1 x DC Jack
Switches	Port		4 x Pushbutton
	F/W Upgrade		1 x Slide
LEDs	On Line/ Selected		4 (Orange)
	USB Link		4 (Green)
Emulation	Keyboard	I/Mouse	USB
Video			2048 x1536; DDC2B
Scan Interval			1~99 seconds

http://www.aten.com/products/productItem.php?pcid=20070130111333003&psid=20... 20.09.2007

Power Consumption		DC5V, 1.25W
Environment	Operating Temp.	0~50°C
	Storage Temp.	-20~60°C
	Humidity	0~80% RH, Non-densing
Physical Properties	Housing	Metal
	Weight	0.70 kg
	Dimensions (LxWxH)	21.00 x 8.50 x 5.50 am

^{*} The specification and pictures are subject to change without notice.

 $[\]ensuremath{^{*}}$ All trademarks and logos are the properties of their respective holders.



ATEN.com is published by ATEN International Co. Ltd., Taiwan. All rights reserved.