

Synergy 21 LED remote smart panel single color 4zones *Milight/Miboxer*



Experience the latest control technology for your lighting with the **4-Zone Brightness Dimming Smart Panel Remote Controller**. This innovative, surface-mounted control panel gives you the ability to precisely and conveniently control the brightness of your single-colour LED lighting, ideal for any room in your home or office.

The **4-Zone Brightness Dimming Smart Panel Remote Controller** works with a voltage of 3V and requires two AAA batteries, which are not included. With a transmission frequency of 2400-2483.5MHz and the GFSK modulation method, this smart panel provides a stable and reliable connection to your lighting devices. The transmission power of 6dBm enables a control range of up to 30 metres, so you can conveniently adjust the lighting from a distance.

The panel is characterised by an extremely low standby power consumption of only 20uA, which ensures a long battery life. The compact and elegant design with a size of 86*86mm blends seamlessly into any environment and offers a user-friendly interface for easy operation.

With the **4-Zone Brightness Dimming Smart Panel**, you can control the brightness in up to four different zones independently of each other. This gives you the freedom to create and customise different lighting scenarios for different areas of your home or office. Whether you want relaxed, dimmed lighting in the living room or a bright, productive atmosphere in the study, this smart panel gives you the flexibility to customise your lighting to suit your needs.

4 zone radio single colour Smart Panel surface-mounted

Product Name: 4-Zone Brightness Dimming Smart Panel Remote Controller

Model No.: B1

Working Temperature: -20 -60°C


Voltage: 3V(2*AAA Battery)
Transmission Frequency: 2400-2483.5MHz
Modulation Method: GFSK
Transmitting Power: 6dBm
Control Distance: 30m
Standby Power: 20uA
Panel Size: 86*86mm

Requires 2 AAA batteries, not included

Attributes

Attribute	Value
Grösse:	86*86
Weight:	0.15 Kg
Warranty:	24.00 Months

Additional Images

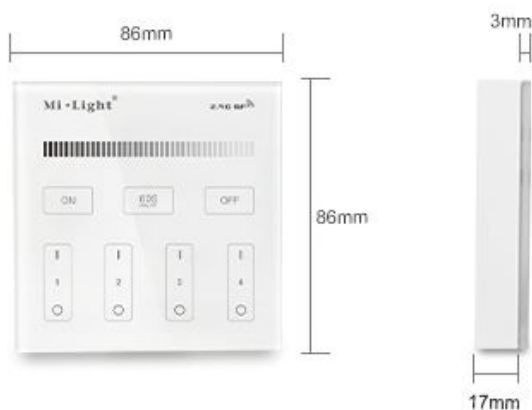

NO wiring, pasting, moveable, easy operation

Free installation, no wiring, removable, easy operation

NO wiring Moving easily

2.4GHz wireless transmitting 30m control distance

Free installation no wiring, more convenient and smart

2.4G 30m Distance remote control

4-zone individually control

Each zone control countless lamps or controllers

Compatible 4-zone Single White series

Control all Mi-Light 4-zone Single White LED bulbs, 4-zone Single White LED controllers



60S Delay OFF







Touch "60S Delay OFF", light will be off automatically after 60 seconds







1~100% Brightness dimming

Dimming(1%~100%) the light randomly



COMPATIBLE REMOTE SHEET

Product	Compatible Remote
	
	
	

Accessories

Part No.	Name
147689	Batterien Micro AAA 1,5V *Duracell* Industrial 10er Pack
124657	Synergy 21 LED dekoline wine glass RGB-W ww *Milight/Miboxer*
124652	Synergy 21 LED dekoline wine glass RGB-W cw *Milight/Miboxer*
147979	Synergy 21 LED Panel round 12W RGB-WW with RF and WLAN *Milight/Miboxer*
147946	Synergy 21 LED Panel round 6W RGB-WW with RF and WLAN *Milight/Miboxer*
148008	Synergy 21 LED garden lamp 9W RGB-WW with RF and WLAN IP65 24V *Milight/Miboxer*
147980	Synergy 21 LED panel round 15W RGB-WW with RF and WLAN IP54 *Milight/Miboxer*
148013	Synergy 21 LED floodlighter 10W RGB-WW (RGB-CCT) IP65 24V *Milight/Miboxer*
148010	Synergy 21 LED garden lamp 9W RGB-WW with RF and WLAN IP65 230V *Milight/Miboxer*
148017	Synergy 21 LED floodlighter 20W RGB-WW (RGB-CCT) IP65 230V *Milight/Miboxer*
148015	Synergy 21 LED floodlighter 10W RGB-WW (RGB-CCT) IP65 230V *Milight/Miboxer*
148113	Synergy 21 LED floodlight 50W RGB-WW (RGB-CCT) IP65 230V *Milight/Miboxer*
148018	Synergy 21 LED floodlighter 30W RGB-WW (RGB-CCT) IP65 230V *Milight/Miboxer*