


P1: M-003  
P2: M-028A

Customer No.: No.: 6

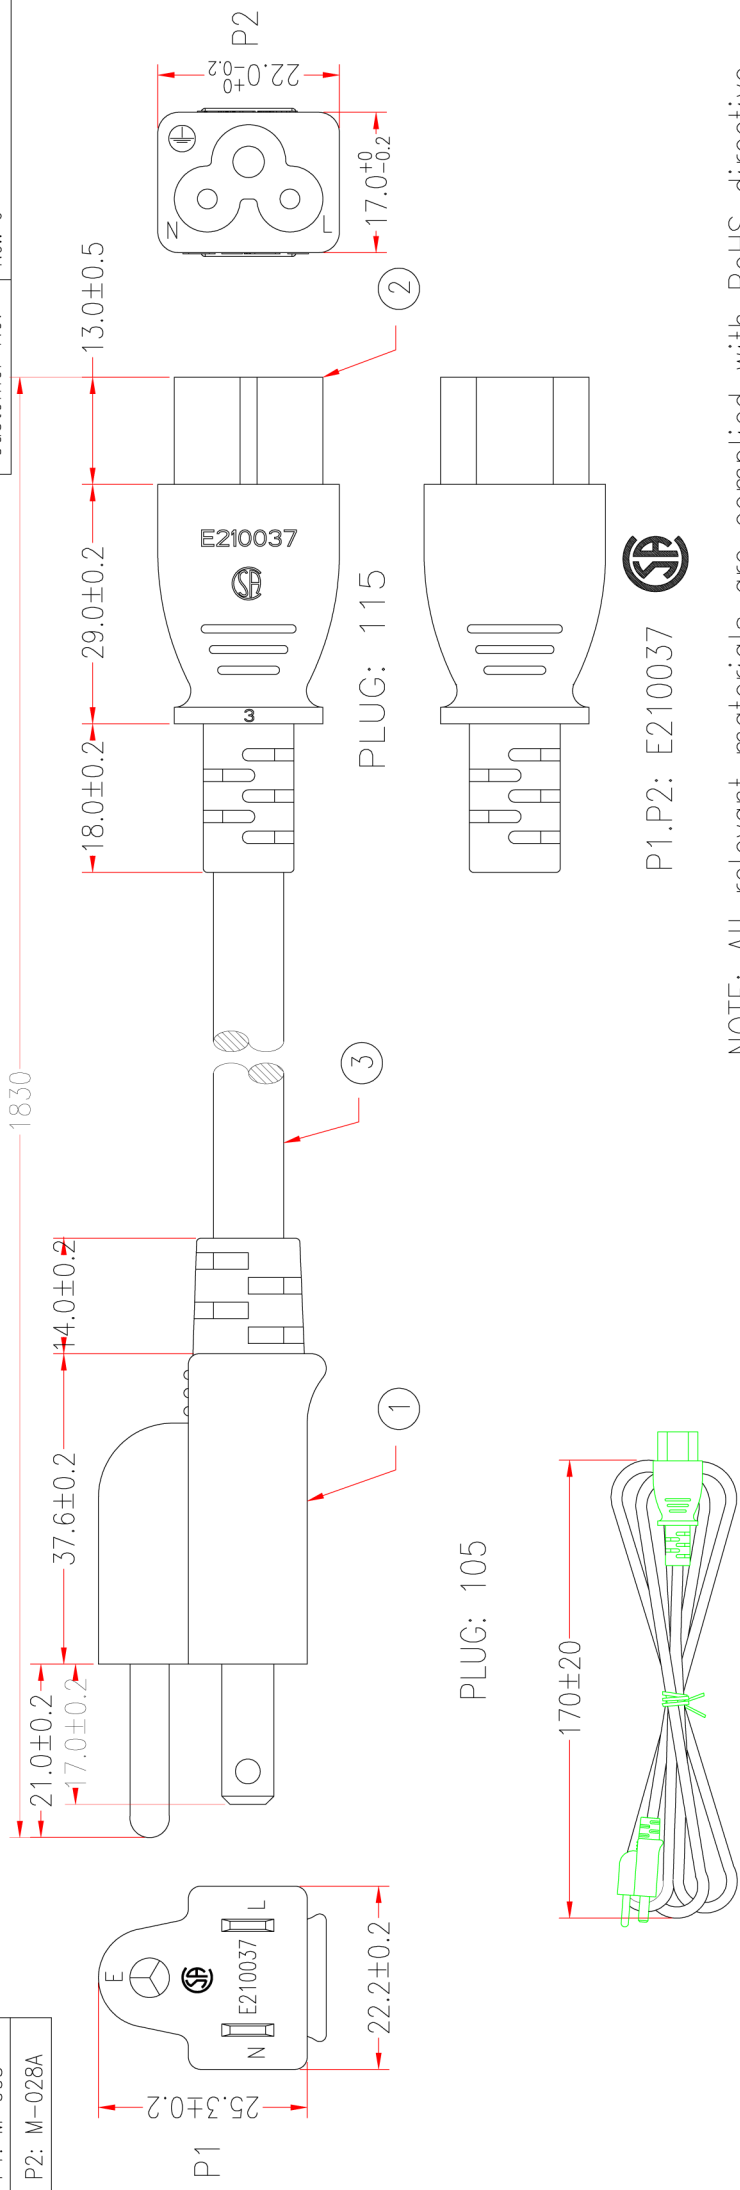

P1.P2: E210037

NOTE: All relevant materials are complied with RoHS directive .

MARKING:

(UL) SVT 3/C 18AWG(0.824MM<sup>2</sup>) VW-1 75°C 300V E204978  
CSA SVT 3/C 0.824MM<sup>2</sup> (18AWG) FT2 60°C 300V LL204790

P1	P2
BLACK	L
WHITE	N
GREEN	E

3	UL SVT 18AWG x 3C, OD 6.3mm, JACKET BLACK, DRAWING No.EPSVT011803C-028	1800mm	M304
	MOLDED PVC 35P, COLOR BLACK		M304
2	BRACKET: HB-011C0416050102	1	M765
	TERMINAL: 98732PS-0	1	M257
	TERMINAL: 98714PS-0	2	M257
1	MOLDED PVC BLACK, 35P		M304
	BRACKET: YS-002	1	M767
	TERMINAL: 98661BS-1	2	M257
	TERMINAL: ø4.75mm SH403	1	M256
No.	DESCRIPTION	Q'TY	Supplier

PART NO. 105115B1F18B Revision:

APPROVED		Cable Length Unless Other Tolerances:	±10mm
CHECKED	TIAN		±20mm
DRAWING	HUANG		±25mm
			±30mm
			±40mm

CHECKED

DATE 30/OCT/07 ITEM NO.

EK497.1,8

UNIT:mm

