


Synergy 21 LED retrofit GX5, 3 4x1W nw V2 - 24V Version



SYNERGY 21

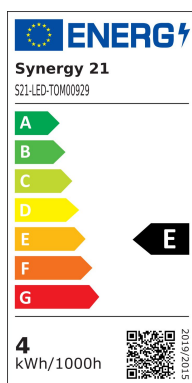

| | |
|----------------------------|------------|
| kwh/1000h: | 4,00 |
| Lumens: | 440 |
| Watt: | 4,0 |
| Nominal Service Life: | 35000 Std. |
| Switching Cycles: | 50000 |
| Opt. Ambient Temperature.: | 25 °C |



Base: GX5.3
4x1Watt LEDs
Aluminium housing
Operating voltage 24V DC
Power consumption: 4 W
Lumen: 440 lm
Kelvin 4500±250
Beam angle 60°
Dimmable: no
DxH: 50mm*60mm
Can be used as a replacement for conventional halogen mirror lamps.

Colour: Neutral white

Caution:

Please only use regulated or switching power supply units with the Synergy 21 LED GX5.3/MR16 spots. Do NOT use halogen transformers or wound power supply units, otherwise there is a risk of the LED being destroyed by overvoltage.

Please be sure to measure the voltage beforehand.

We recommend using the Synergy 21 Digital Multimeter DM830 to measure the voltage.

Please note that Synergy21 LED retrofit lamps may only be operated at an operating temperature between 0-50 C°.

In the event of deviations, the service life of the LEDs cannot be guaranteed!

Energy efficiency class: A++
kWh/1000h: 4

Attributes

| Attribute | Value |
|-----------------------|--------------|
| Abstrahlwinkel: | 60 |
| Ampere: | 0.16 |
| CRI: | 80 |
| Dimmbar: | Nein |
| Grösse: | 50*60 |
| Lichtfarbe: | neutralweiss |
| Lichtfarbe in Kelvin: | 4500 |
| Lumen: | 440 |
| Schutzklasse: | IP20 |
| Socket: | GX5,3 |
| Weight: | 0.1 Kg |
| Warranty: | 60.00 Months |

Accessories

| Part No. | Name |
|----------|------------------------------------------------------------|
| 85498 | Synergy 21 LED adapter / socket for LED lamps GX5.3 and G4 |
| 107727 | HEP Power Supply - 12V 12W - HEP for Flush Mount Box |