


Synergy 21 LED spot pendant luminaire UFO 236W for industry/warehouse



kwh/1000h:	236,00
Lumens:	30680
Watt:	236,0
Nominal Service Life:	50000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C

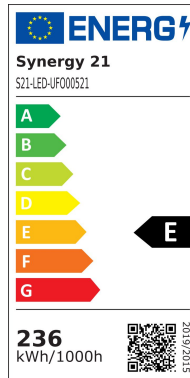

AC 90-305V/50-60Hz
Dimmable: 1-10 Volt
Power: 236 Watt
Luminous flux: 30680lm
Efficiency: 130lm/W
Beam angle: 120°
CRI Ra: > 80
Light colour: warm white
Kelvin: 4500K ± 200K
Operating temperature: -40 to +55°C
Protection class: IP65, IK10, "D" mark according to EN 60598-2-24
Weight: 4.8kg
Diameter: 400mm
Complete height: 203.5mm


Energy efficiency class: A++
kWh/1000h: 236

5 year guarantee
IES files available on request

Attributes


Attribute	Value
Abstrahlwinkel:	120
Betriebstemperatur:	-40 bis +55
CRI:	>80
Dimmbar:	0-10V
Grösse:	260*177,5
LED - Gehäusefarbe:	schwarz
LED - Gehäusematerial:	Aluminium
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4500
Lumen:	30680
Schutzklasse:	IP65, IK10
Volt:	230
Weight:	3 Kg
Warranty:	60.00 Months

Additional Images

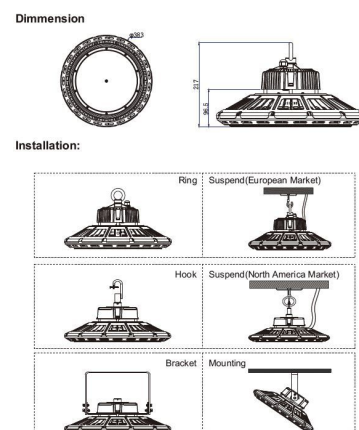



Weight:4.80Kg




Product Description

- 1, Compact and fasion design .Light weighted : 4.80kg
- 2, Philips 3030 LED as light source , CR>80Ra
- 3, MEAN WELL HBG Series power supply . PF>0.95
- 4, High lumen efficiency : 135lm/w
- 5, 5 years warranty .

Performance Summary

Input Power: 80W, 100W, 150W, 200W, 230W
 CRI: >70Ra/80Ra
 CCT: 3000k-6500K
 Input Voltage:90-305Vac
 Limited Warranty :5 years' warranty
 High Efficacy Lifetime: 50000hours
 Dimming:Non-dimmable & 1-10V Dimmable
 Working Temperature : - 20°C – +45 °C(Amb)

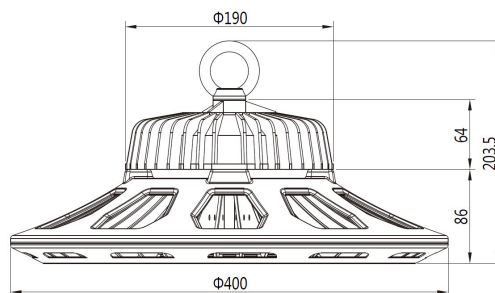

Accessories

Part No.	Name
139692	Synergy 21 LED Spot Pendelleuchte UFO zub. Radar Kit L
142948	Synergy 21 LED spot pendant light UFO add. Wall bracket for UFO size L bracket long
142947	Synergy 21 LED spot pendant light UFO add. Wall bracket for UFO size L bracket short
144400	Synergy 21 LED spot pendant light UFO add. Ball cage L
148949	Synergy 21 LED spot pendant light UFO add. Lampshade L
124243	Mean Well power supply unit - DALI Controller

Part No.	Name
137874	Mean Well power supply unit - DALI Controller S01
148726	Synergy 21 - Waterproof connector 1:1
148727	Synergy 21 - Waterproof connector 1:2
148730	Synergy 21 - Waterproof connector box 3 ports
148729	Synergy 21 - Waterproof connector box 3 ports transparent
148728	Synergy 21 - Waterproof connector box 4 ports
133947	ALLNET MSR ALL4460 / 0-10V DIMM actuator with ON/OFF for LED
134571	ALLNET ALL3419 / IP Building-Autom. 3x I2C, 1x USB, LAN/WLAN
134899	Synergy 21 Netzteil - Einschaltstrombegrenzer OSRAM
157359	Finder SSR relay (inrush current limiter)
157358	Finder installation contactor 25A (inrush current limiter)
158976	Finder dimmer for top-hat rail Master
158977	Finder dimmer for top-hat rail SLAVE
140646	Synergy 21 LED sensor 0-10V brightness sensor