



ITEM NO.	LENGTH(L)
K5256SW.0,5	500mm
K5256SW.1	1000mm
K5256SW.1,8	1800mm
K5256SW.3	3000mm
K5256SW.5	5000mm
K5256SW.2	2000mm
K5256SW.1,5	1500mm

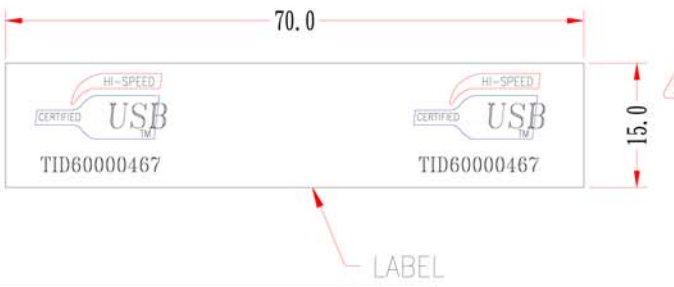

MARKING:
 HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1P+20AWG/2C (UL) TYPE CM 75°C

- ⚠️ 4 The cable must accord:
 Operating temperature: between -20°C and +80°C
 Storage temperature: between -40°C and +85°C
- * NOTE: All relevant materials are complied with RoHS directive .
- ⚠️ This cable is silicone free.
- ⚠️ 100% SHORT AND PPEN TEST

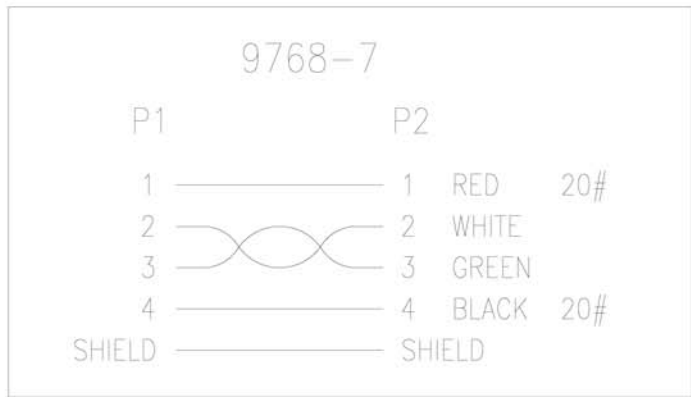

5	MOLDED PVC BLACK(-40°C~+85°C,COLD-RESISTANT)	H1BF10-0304K09		M304
4	MOLDED PVC BLACK(-40°C~+85°C,COLD-RESISTANT)	H1BF10-0304K09		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 20AWG, BRAID 80%, OD 5.0mm, JACKET BLACK, (-40°C~+85°C,COLD-RESISTANT) DRAWING No. EUAB2801P2002C-096	H5KH22-0304K09	L-20mm	M304
2	USB B MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, THREE PIECS SOLDER TYPE	A1HB14-0108	1set	M108
1	USB A MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR,THREE PIECS SOLDER TYPE	A1HA12-0108	1set	M108
No.	DESCRIPTION		Q'TY	Supplier