




■ Features :

- True sine wave output (THD<3%)
- High surge power up to 2000W
- High efficiency up to 92%
- Power ON-OFF switch
- Standby saving mode can be selected
- Front panel indicator for operation status
- Built-in fan ON-OFF control function
- Protections: Bat. low alarm / Bat. low shutdown / Over voltage / Over temp. / Output short / Input reverse polarity / Overload
- Application : Home appliance, power tools, office and portable equipment, vehicle and yacht ...etc.
- 3 years warranty



SPECIFICATION


| MODEL   | TS-1000-112□  | TS-1000-124□             | TS-1000-148□  | TS-1000-212□  | TS-1000-224□                  | TS-1000-248□ |
|---|---|--------------------------|---|---|-------------------------------|--------------|
| OUTPUT  | RATED POWER (Typ.) 1000W  |                          |   |   |                               |              |
|   | MAXIMUM OUTPUT POWER (Typ.) 1150W for 180 sec. / 1500W for 10 sec. / surge power 2000W for 30 cycles  |                          |   |   |                               |              |
|   | AC VOLTAGE  |                          |   | AC VOLTAGE  |                               |              |
|   | Factory setting set at 110VAC   |                          |   | Factory setting set at 230VAC                             |                               |              |
|   | 100 / 110 / 115 / 120VAC selectable by setting button S.W   |                          |   | 200 / 220 / 230 / 240VAC selectable by setting button S.W |                               |              |
|   | FREQUENCY   |                          |   | FREQUENCY   |                               |              |
|   | 60±0.1Hz 50/60Hz selectable by setting button S.W   |                          |   | 50±0.1Hz 50/60Hz selectable by setting button S.W         |                               |              |
| WAVEFORM Note.6 True sine wave (THD<3%)   |   |                          |   |   |                               |              |
| AC REGULATION (Typ.) ±3.0%  |   |                          |   |   |                               |              |
| SAVING MODE (Typ.) Default disabled. Load ≤5W will be changed to standby mode                           |   |                          |   |   |                               |              |
| FRONT PANEL INDICATOR Battery voltage level, output load level, saving mode, fault and operation status |   |                          |   |   |                               |              |
| INPUT   | BAT. VOLTAGE  |                          | BAT. VOLTAGE  |   | BAT. VOLTAGE                  |              |
|   | 12V   |                          | 24V   |   | 48V                           |              |
|   | VOLTAGE RANGE (Typ.) Note.4,6   |                          | VOLTAGE RANGE (Typ.) Note.4,6                                   |   | VOLTAGE RANGE (Typ.) Note.4,6 |              |
|   | 10.5 ~ 15VDC  |                          | 21 ~ 30VDC  |   | 42 ~ 60VDC                    |              |
|   | DC CURRENT (Typ.)   |                          | DC CURRENT (Typ.)   |   | DC CURRENT (Typ.)             |              |
|   | 100A  |                          | 50A   |   | 25A                           |              |
|   | NO LOAD DISSIPATION (Typ.) ≤6W @ standby saving mode  |                          |   |   |                               |              |
| OFF MODE CURRENT DRAW ≤1mA  |   |                          |   |   |                               |              |
| EFFICIENCY (Typ.) Note.1  |   | EFFICIENCY (Typ.) Note.1 |   | EFFICIENCY (Typ.) Note.1                                  |                               |              |
| 88%   |   | 89%                      |   | 90%   |                               |              |
| BATTERY TYPES Open & sealed lead acid   |   |                          |   |   |                               |              |
| BATTERY INPUT PROTECTION  | FUUSE   |                          | FUUSE   |   | FUUSE                         |              |
|   | 40A*4   |                          | 40A*2   |   | 20A*2                         |              |
|   | BAT. LOW ALARM  |                          | BAT. LOW ALARM  |   | BAT. LOW ALARM                |              |
|   | 11.3±4%   |                          | 22.5±4%   |   | 45±4%                         |              |
| BAT. LOW SHUTDOWN   |   | BAT. LOW SHUTDOWN        |   | BAT. LOW SHUTDOWN   |                               |              |
| 10.5±4%   |   | 21±4%                    |   | 42±4%   |                               |              |
| REVERSE POLARITY By internal fuse open  |   |                          |   |   |                               |              |
| OUTPUT PROTECTION   | OVER TEMPERATURE  |                          |   | OVER TEMPERATURE  |                               |              |
|   | 90°C ± 5°C  |                          |   | 70°C ± 5°C  |                               |              |
|   | Protection type : Shut down o/p voltage, re-power on to recover; by internal RTH3 detect on heatsink of power diode   |                          |   |   |                               |              |
|   | OUTPUT SHORT Protection type : Shut down o/p voltage, re-power on to recover  |                          |   |   |                               |              |
| OVER LOAD (Typ.) 105 ~ 115% load for 180 sec., 115% ~ 150% load for 10 sec.                             |   |                          |   |   |                               |              |
| Protection type : Shut down o/p voltage, re-power on to recover   |   |                          |   |   |                               |              |
| GFCI PROTECTION Optional (Only type F) None   |   |                          |   |   |                               |              |
| ENVIRONMENT   | WORKING TEMP. Note.3 0 ~ +40°C @ 100% load ; +60°C @ 50% load   |                          |   |   |                               |              |
|   | WORKING HUMIDITY 20% ~ 90% RH non-condensing  |                          |   |   |                               |              |
|   | STORAGE TEMP., HUMIDITY -30 ~ +70°C / -22 ~ +158°F, 10 ~ 95% RH non-condensing  |                          |   |   |                               |              |
|   | VIBRATION 10 ~ 500Hz, 3G 10min./1cycle, 60min. each along X, Y, Z axes  |                          |   |   |                               |              |
| SAFETY & EMC  | SAFETY STANDARDS UL458 (only for "GFCI" receptacle-Type F) None   |                          |   |   |                               |              |
|   | LVD   |                          |   | LVD   |                               |              |
|   | None  |                          |   | EN60950-1   |                               |              |
|   | WITHSTAND VOLTAGE Bat I/P - AC O/P:3.0KVAC AC O/P - FG:1.5KVAC  |                          |   |   |                               |              |
|   | ISOLATION RESISTANCE AC O/P-FG, Bat I/P-FG:100M Ohms/500VDC / 25°C / 70% RH   |                          |   |   |                               |              |
|   | EMC EMISSION  |                          |   | EMC EMISSION  |                               |              |
| Compliance to FCC class A   |   |                          | Compliance to EN55032 class A, 72/ 245/ CEE, 95/ 54/ CE, E-Mark |   |                               |              |
| EMC IMMUNITY None Compliance to EN61000-4-2,3,8   |   |                          |   |   |                               |              |
| OTHERS  | MTBF 66.9K hrs min. MIL-HDBK-217F (25°C)  |                          |   |   |                               |              |
|   | DIMENSION 345*184*70mm (L*W*H)  |                          |   |   |                               |              |
|   | PACKING 4.3Kg; 2pcs/9.6Kg/1.16CUFT  |                          |   |   |                               |              |
|   | COOLING Loading controlled cooling fan for GFCI receptacle-type F ; Thermostatically controlled cooling fan for others.   |                          |   |   |                               |              |
| NOTE  | <p>1.Efficiency is tested by 750W, linear load at 13V, 26V, 52V input voltage.</p> <p>2.All parameters not specified above are measured at rated load, 25°C of ambient temperature and set to factory setting.</p> <p>3.Output derating capacity referenced by curve 1.</p> <p>4.Input derating capacity referenced by curve 2.</p> <p>5.The tolerance of each voltage value by models is:112/212→±0.5V;124/224→±1V;148/248→±2V</p> <p>6.TH.D is tested by 1000W, linear load at 13,26,52V input voltage.</p> |                          |   |   |                               |              |

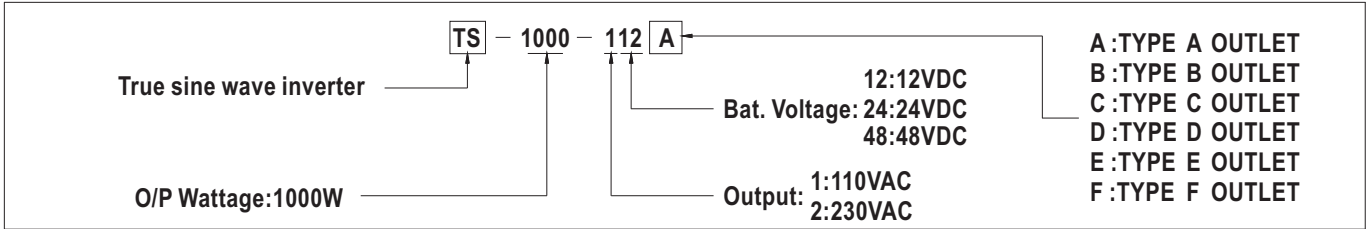




■ AC Output Receptacles (optional)

| Receptacle type |     |        |           |     |       |      |
|-----------------|-----|--------|-----------|-----|-------|------|
| Country         | USA | EUROPE | AUSTRALIA | U.K | JAPAN | GFCI |
| Certificate     |     |        |           |     |       |      |


■ Mechanical Specification

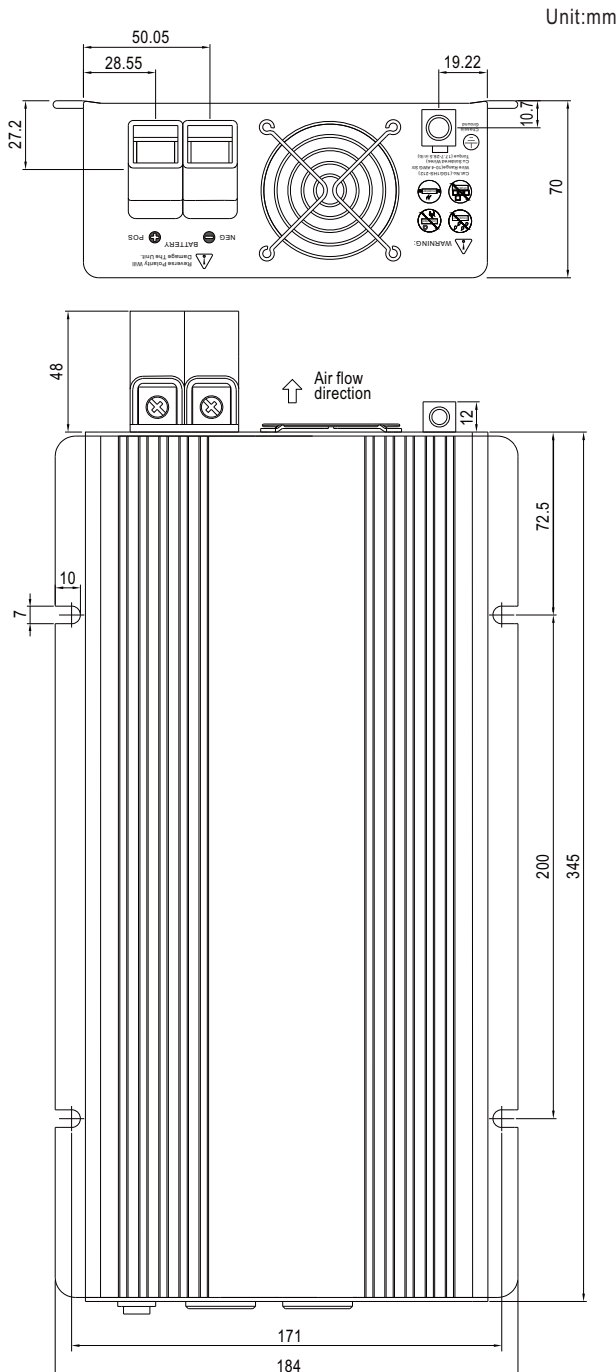

■ Derating Curve

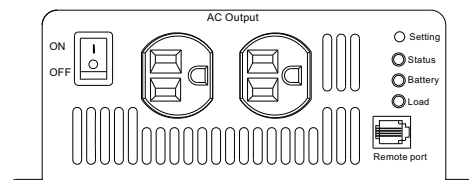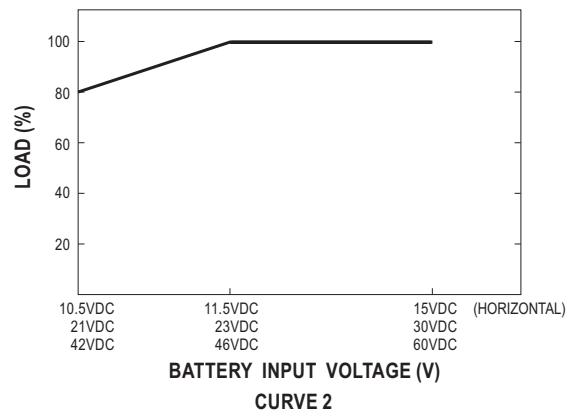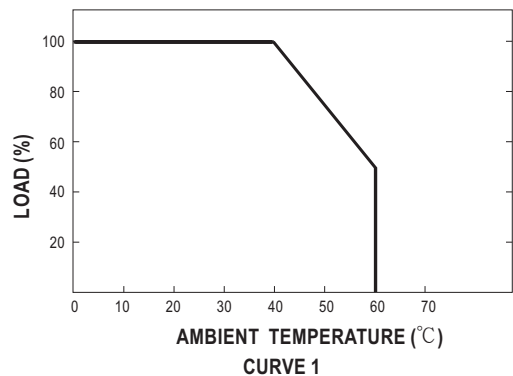

Type-A

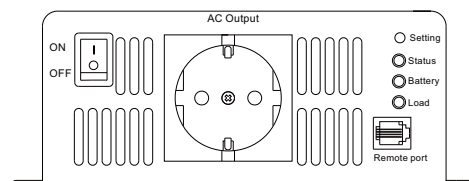

Type-B