Synergy 21 LED light panel R600/R1000 with pendant kit
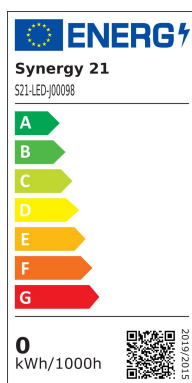
kwh/1000h:	0,00
Lumens:	0
Watt:	0,0
Nominal Service Life:	0 Std.
Switching Cycles:	0
Opt. Ambient Temperature.:	0 °C

4 0 3 8 8 1 6 0 3 3 8 0 2

Diameter ceiling mounting box: approx. 20cm
Height of ceiling mounting box: approx. 4cm
Rope length: approx. 150cm (3 pieces)

Accessories

Part No.	Name
126765	Synergy 21 LED light panel add mounting kit pendant set II
92793	Synergy 21 LED light panel add mounting kit pendant set round
92795	Synergy 21 LED light panel add mounting kit S-angle for V1+V2 panel
90892	Synergy 21 LED light panel add mounting kit cylinder for V1+V2 panel silver
99663	Synergy 21 LED-Lichtpaneel zub Montage Kit Flaps
113855	Mean Well power supply - CC Driver 1400mA ~42V IP67
113856	Mean Well power supply - CC Driver 1400mA ~42V 0-10V dimm IP67
104642	Synergy 21 Power supply - CC Driver 500~1400mA ~60W Mean Well dali dimm
114125	Mean Well power supply - CC Driver 1400mA 25~43V Triac dimm
131690	Synergy 21 LED light panel 300*1200 Up& Down or Pontos transparent cable for power supply

Part No.	Name
	unit

Errors and technical changes that serve the interests of progress or development of the product, are reserved.