


PIN OUT

P1 HDMI AM		P2 HDMI AM	
1	1		
3	3		
2	2		
4	4		
6	6		
5	5		
7	7		
9	9		
8	8		
10	10		
12	12		
11	11		
14	14		
19	19		
17	17		
13	13		
15	15		
16	16		
18	18		
SHELL	SHELL		

**NOTE:**

1. Electrical test:
  - (1). 100% open short & miss wire test;
  - (2). Insulation resistance: 10M ohm Min;
  - (3). Contact resistance: 3 ohm Max;
  - (4). HI-POT TEST: DC 300V/10ms
  - (5). HD-TV TEST, 4k\*2k@120Hz (3840\*2160@120Hz) or 8k\*4k@60Hz (7680\*4320@60Hz) resolution 4:4:4 8bit bandwidth (48Gbps)
2. RoHS 3.0 and REACH COMPLIANT
3. PRINT WORD: Ultra High Speed HDMI™ Cable with Ethernet E\*\*\*\*\* 兄AWM STYLE 20276 80°C 30V VW-1
4. PACKING: 1pcs/SYNERGY 21 PE BAG+label

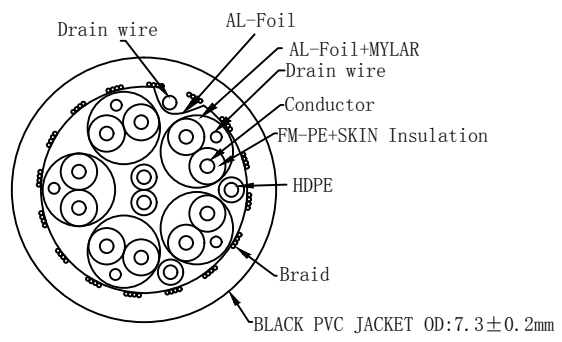

**MATERIAL LIST:**

④	OUTER MOLD	PVC Black	2	
③	INNER MOLD	LD-PE	2	
②	HDMI Connector	19P A/M, The Pin Gold Plated, The Shell Gold Plating	2	
①	CABLE	[(1/28AWG *1P+D+AL/Mylar)*5P+(30AWG *4C)+ADB PVC BLACK OD:7.3±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ITEM NO	LENGTH
S215415V3	3000±50mm

					SYNERGY 21			
CUSTOMER					ITEM NO.	see the chart		
PRODUCT NAME		HDMI2.1v AM-AM WITH ETHERNET Cable 28AWG			manufacture country:	CHINA	UNIT	MM
DRAWNBY		SYNERGY 21			CHECKBY	SYNERGY 21		APPOBY
DATE		2021-01-29			REV.	A		
REVISION RECORD MODIFICATIONS		NEW						
BY	CHK	REVISION RECORD MODIFICATIONS			DATE	2021-01-29		