


Synergy 21 LED Spot Outdoor floodlight 30W black housing - neutral white V2



SYNERGY 21

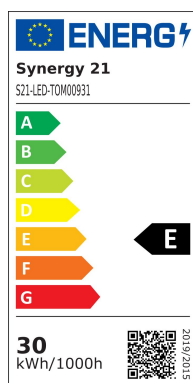

kwh/1000h:	30,00
Lumens:	3900
Watt:	30,0
Nominal Service Life:	35000 Std.
Switching Cycles:	50000
Opt. Ambient Temperature.:	25 °C



With emergency power function (from 80V approx. 20% brightness) and reversible overheating protection
Dimmable (leading edge and trailing edge phase dimmer)
Single-pane safety glass
Stainless steel mounting bracket
IP65 suitable outdoor cable H05RNF


With emergency power function and overheating protection
Operating voltage: >AC 207-253V
LED: 30Watt high-power chip
Beam angle: 120°
Lumen: 3900lm
Efficiency: 130Lm/Watt
Cool white: 4500K ±150
CRI: >80
Dimmable: yes (leading edge and trailing edge phase control dimmer)
Housing: Injection-moulded aluminium in black
Front glass: toughened safety glass (ESG)
Operating temperature: -25°C to +55°C
Protection class: IP65 (water jet-proof)
Weight: 2.3kg
Dimensions: (l*w*h) 126*225*185mm

Energy efficiency class: A++
kWh/1000h: 30

Attributes

Attribute	Value
Abstrahlwinkel:	120
Ampere:	0.16
Betriebstemperatur:	-25°C bis +55°C
CRI:	>80
Dimmbar:	TRIAC
Grösse:	126*225*185
LED - Gehäusefarbe:	schwarz
LED - Gehäusematerial:	Aluminium
Lichtfarbe:	neutralweiß
Lichtfarbe in Kelvin:	4500
Lumen:	3900
Schutzklasse:	IP65
Volt:	230
Weight:	2.3 Kg
Warranty:	60.00 Months

Additional Images

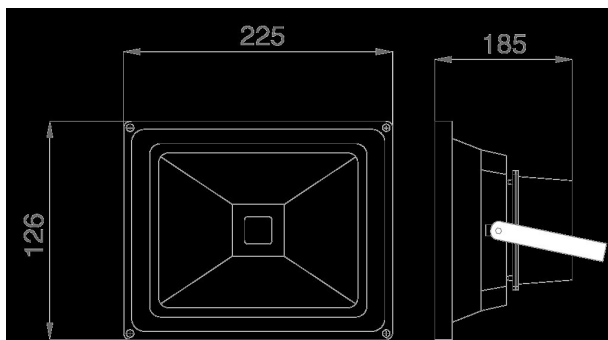

Accessories

Part No.	Name
92416	Synergy 21 LED Spot Outdoor floodlight 30W - Replacement glass Replacement lens
82434	Finder Twilight Switch suitable for Synergy 21 LED outdoor spotlight
148726	Synergy 21 - Waterproof connector 1:1
148727	Synergy 21 - Waterproof connector 1:2
148730	Synergy 21 - Waterproof connector box 3 ports
148729	Synergy 21 - Waterproof connector box 3 ports transparent
148728	Synergy 21 - Waterproof connector box 4 ports
147265	Netzkabel 230V Schutzkontakt CEE7(Stecker)->Open End mit Adernendhülsen, 1,8m,Black